

DAFA RooFoil 150™

DAFA RooFoil 150 is a part of DAFA AirVent System and is a strong permeable fabric which can be used for both roof decking and wind barriers in a lightweight external wall structure.



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

Application

DAFA RooFoil 150 is used as a self-supporting rolled product for roof decking in both ventilated and non-ventilated roof structures with a pitch above 15°. DAFA RooFoil 150 is used as a wind barrier in a ventilated, lightweight external wall cladding. May only be used behind facades that are sealed against UV light.

The material

DAFA RooFoil 150 is a three-layer fabric, manufactured from a combination of PP weave and foil with high tearing strength. The fabric is permeable with an Sd value of approx. 0.015 m. The Sd value must be multiplied by a factor of approx. 5.7 to obtain the Z value.

DAFA RooFoil 150 has a blue surface with dotted lines on both sides for marking overlaps.

DAFA RooFoil 150 is included in the Nordic Ecolabellings database of construction products that can be used in Swan-labelled buildings.

Supplied sizes


DAFA RooFoil 150 is supplied in rolls with a width of 1.5 m and 1.1 m and a length of 50 m.

Transport, delivery and storage

DAFA RooFoil 150 is packed in PE foil and stored horizontally on Europallets, dry and protected against the weather and direct sunlight.

Quality assurance

DAFA RooFoil 150 is CE-marked according to EU standard EN 13859-1.

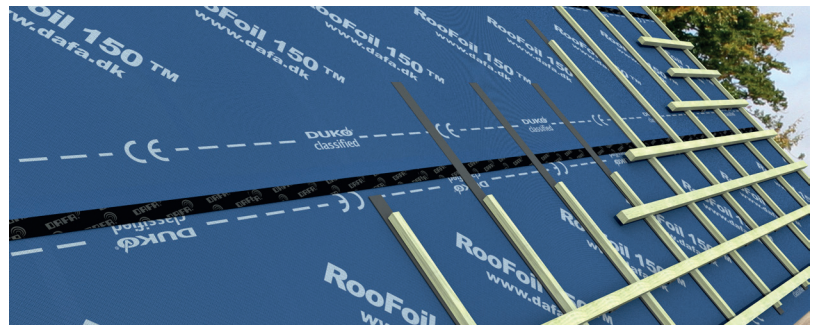

Dimensions

DAFA RooFoil 150 is easy to roll out, with a low weight of only 150 g / m². With 50 m on each roll, the number of joints can be reduced significantly.



Technical specifications


Name	Method	Unit	Result
Roll length	EN 1848-2	m	≥50
Roll width	EN 1848-2	m	1,1 og 1,5 -0,5%, +2%
Weight	EN 1849-2	g/m²	150 ± 10%
Fire classification	EN 13501-1	Class	E
Tearing strength /lengthways/crosswise	EN 12310-1	N	150/180 +100/-50
Elongation upon failure lengthways/crosswise	EN 12311-1	%	70/90 +40/-30
Tensile strength lengthways/crosswise	EN 12311-1	N/50 mm	290/200 ±70
S _d value	EN 1931 DIN EN ISO 12572	Sd m	0,015
Vater tightness	EN 1928	Class	W1
Temperature resistance	EN 1109	°C	-25
Exposure time			8 weeks max
DAFA item no. (1,1 m / 1,5 m)			620023114 / 620023104
EAN no. (1,1 m / 1,5 m)			5705636400570 / 5705636400556

DAFA RooFoil 150™


Roof decking structures

DAFA RooFoil 150 is permeable and therefore suitable for use as roof decking in both ventilated and non-ventilated roof structures.

DAFA RooFoil 150 as self-supporting roof decking in ventilated structure.




DAFA RooFoil 150 as self-supporting, permeable roof decking in non-ventilated structure.



External wall structures


DAFA RooFoil 150 is a strong permeable fabric, which is suitable as a wind barrier in a lightweight, external wall structure with a ventilated cavity behind the rainshield on the facade.

DAFA RooFoil 150 as a wind barrier in ventilated external wall cladding.




Installation


Installation of DAFA RooFoil 150 can be performed in damp weather, but must not be performed in freezing conditions. Maximum exposure time is eight weeks. As DAFA RooFoil 150 is permeable, it can be insulated right out to the fabric. DAFA RooFoil 150 is rolled out with the product name facing outward and with a minimum overlap of 150 mm. Joints are taped with DAFA UV tape for a full seal. DAFA RooFoil 150 is not a safe tread surface and it does not prevent falls.

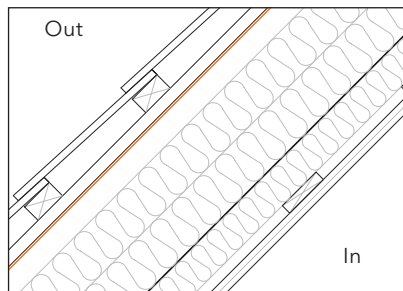

DAFA RooFoil 150 used as roof decking with ventilation between insulation and roof decking.

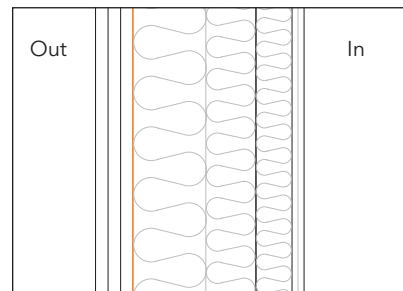


DAFA RooFoil 150 used as a wind barrier with a ventilated cavity behind the rain-shield.

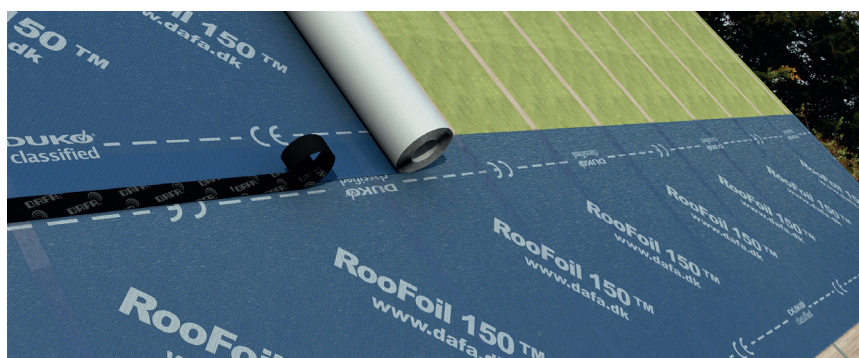


DAFA RooFoil 150 is installed with a minimum overlap of 150 mm and free joints are taped using DAFA UV tape.

Recommended accessories from DAFA



DAFA UV tape

Ideal for overlap taping roofing and wind barriers.



DAFA universal outdoor adhesive

Specially made adhesive with excellent adhesive properties.



DAFA UV cable collar

Fully sealed conduits for cables or electrical boxes.



DAFA UV pipe collar

Fully sealed conduits for round or rectangular pipes.

DAFA AirVent System comprises a large range of accessories for DAFA RooFoil 150 which are special products that make difficult details easier and ensure a fully sealed installation. Read more at www.dafa-build.com/en/airvent

