

DAFA Radon flexible molding

DAFA Radon flexible molding is a part of DAFA Radon System. It is a flexible foam molding designed to contain 300 ml. DAFA Radon Sealant during the curing process.

Application

DAFA Radon flexible molding is flexible PE foam strip, which can be adjusted to any size of plumbing and electric cable cluster penetrations. The strips are coated with acrylic adhesive in order to make the mounting of the molding easy and fast.

Features and advantages


- Flexible mould that may be shaped to suit a wide variety of shapes.
- Self-adhesive underside for quick and effective sealing to DAFA radon membranes.
- Designed to fit 300 ml. of DAFA liquid Radon sealant
- Can be left permanently in place after the curing of the DAFA liquid Radon sealant.

Contents


Supplied apiece according to your project

Dimension

950 x 20 x 25 mm

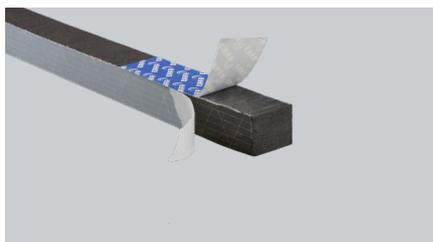

DAFA Radon Flexible molding with self-adhesive underside.

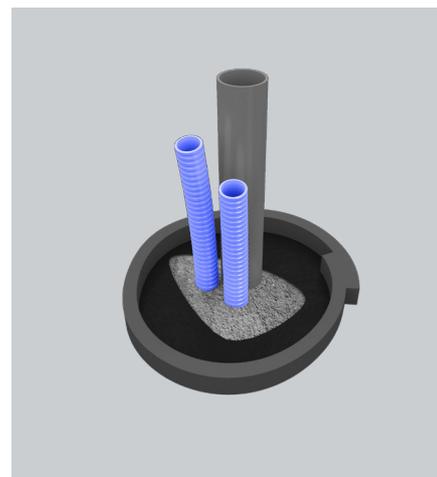

DAFA Radon Flexible molding filled with 300 ml. DAFA liquid Radon sealant.

Technical specifications

Dimensioner	950 mm x 20 mm x 25 mm
Contents per box	10 pcs.
Material	PE 25 kg/m ³
Adhesive	Acrylic 260 g/m ² +/- 10 %
DAFA nr.	620029527
EAN-nr	5705636441177



DAFA Radon Sealing mass
(310 ml. og 5 l.)

and DAFA Radon flexible molding.

