

# DAFA RooFoil 200™



## Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

DAFA RooFoil 200 is a part of DAFA AirVent System and is a strong permeable fabric which can be used for both roof decking and wind barriers in a lightweight external wall structure.

### Application

DAFA RooFoil 200 is packed in PE foil. DAFA RooFoil 200 is stored horizontally on Europallets, dry and protected against the weather and direct sunlight.

### Material

DAFA RooFoil 200 is a three-layer fabric, manufactured from a combination of PP weave and foil with high tearing strength. The fabric is permeable with an Sd value of approx. 0.015 m. The Sd value must be multiplied by a factor of approx. 5.7 to obtain the Z value.

DAFA RooFoil 200 has a black surface with dotted lines on both sides for marking overlaps.

DAFA RooFoil 200 is included in the Nordic Ecolabellings database of construction products that can be used in Swan-labelled buildings.

### Supplied sizes


DAFA RooFoil 200 is supplied in rolls with a width of 1.5 m and 1.1 m and a length of 50 m.

### Transport, delivery and storage

DAFA RooFoil 200 is packed in PE foil. DAFA RooFoil 200 is stored horizontally on Europallets, dry and protected against the weather and direct sunlight.

### Quality assurance

DAFA RooFoil 200 is CE-marked according to EU standard EN 13859-1

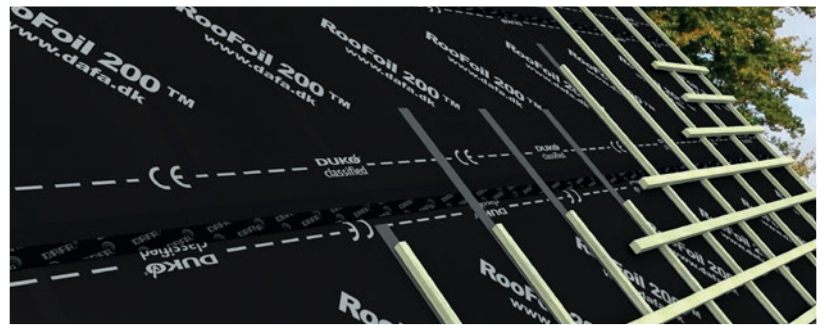

### Dimensions

DAFA RooFoil 200 is easy to roll out, with a low weight of only 200 g/m<sup>2</sup>. With 50 m on each roll, the number of joints can be reduced significantly.

### Technical specifications


Name	Method	Unit	Result
Roll length	EN 1848-2	m	≥50
Roll width	EN 1848-2	m	1,1 og 1,5 -0,5%, +2%
Weight	EN 1849-2	g/m <sup>2</sup>	200 ± 10%
Fire classification	EN 13501-1	Class	E
Tearing strength lengthways/crosswise	EN 12310-1	N	220/160 ±50
Elongation upon failure lengthways/crosswise	EN 12311-1	%	45/70 ±30
Tensile strength lengthway/crosswise	EN 12311-1	N / 50 mm	420/270 ± 70 / ± 50
S <sub>d</sub> value	EN 1931 DIN EN ISO 12572	Sd m	≤ 0,015
Water absorption	EN 1928	Class	W1
Flexibility at low temperatures	EN 1109	°C	-25
Exposure time			8 weeks max.
DAFA item no (1,1 m / 1,5 m)			620023115 / 620023105
EAN no (1,1 m / 1,5 m)			5705636400587 / 5705636400624

# DAFA RooFoil 200™


## Roof decking structures

DAFA RooFoil 200 is permeable and therefore suitable for use as roof decking in both ventilated and non-ventilated roof structures.

DAFA RooFoil 200 as self-supporting roof decking in ventilated structure.



DAFA RooFoil 200 as self-supporting, permeable roof decking in non-ventilated structure.



## External wall structures


DAFA RooFoil 200 is a strong permeable fabric, which is suitable as a wind barrier in a lightweight, external wall structure with a ventilated cavity behind the rainshield on the facade.

DAFA RooFoil 200 as wind barrier in ventilated external wall cladding.




## Installation


Installation of DAFA RooFoil 200 can be performed in damp weather, but must not be performed in freezing conditions. Maximum exposure time is eight weeks. As DAFA RooFoil 200 is permeable, it can be insulated right out to the fabric. DAFA RooFoil 200 is rolled out with the product name facing outward and with a minimum overlap of 150 mm. Joints are taped with DAFA UV tape for a full seal. DAFA RooFoil 200 is not a safe tread surface and it does not prevent falls.

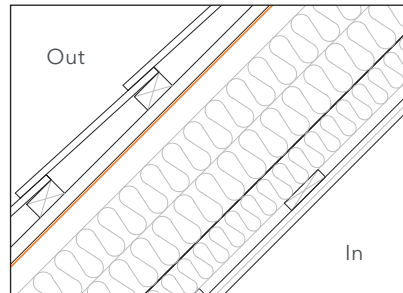

DAFA RooFoil 200 used as roof decking with ventilation between insulation and roof decking.

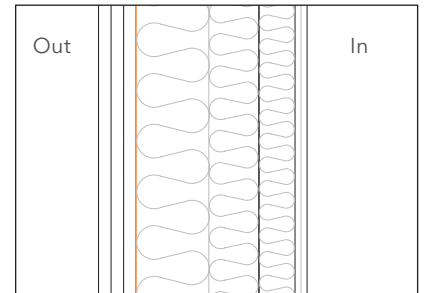


DAFA RooFoil 200 used as a wind barrier with a ventilated cavity behind the rainshield.

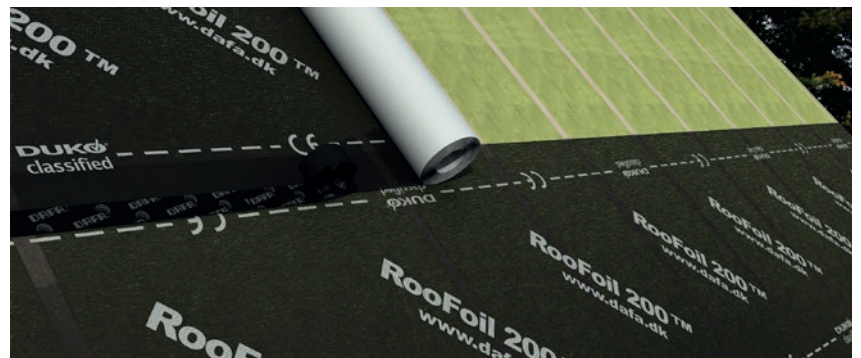

DAFA RooFoil 200 is installed with a minimum overlap of 150 mm and free joints are taped using DAFA UV tape.


## DAFA's associated products are recommended



**DAFA UV tape**  
Adhesive tape with maximum adhesion.



**DAFA roof decking adhesive**  
permanent elastic special rubber for external use.



**DAFA UV cable collar**  
Fully sealed conduits for cables or electrical boxes.



**DAFA UV pipe collar**  
Fully sealed conduits for round or rectangular pipes.

DAFA AirVent System comprises a large range of accessories for DAFA RooFoil 200 which are special products that make difficult details easier and ensure a fully sealed installation.

