

DAFA roof decking tensioners

Type 72 and Type 95



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

Application

DAFA roof decking tensioners are used to tighten all kinds of flexible roof decking to prevent it from rattling in windy weather. This prevents wear to the roof decking and reduces wind noise.


The material

DAFA roof decking tensioners are made from flexible, non-absorbent and UV-resistant black cellular foam. Normally 1-2 pieces are used per m², equivalent to every other roof batten.

- Two sizes - 95 mm and 72 mm
- Fits 32 mm and 25 mm roof battens


Transport, delivery and storage

DAFA roof decking tensioners are supplied in boxes of 100 and 200 pieces. DAFA roof decking tensioners must be stored in the box until use and must be protected against the weather and direct sunlight.

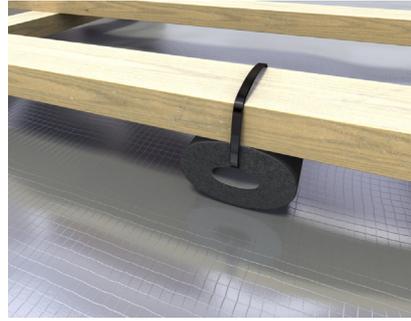


Installation

DAFA roof decking tensioners are flexible and are mounted on the underside of the roof battens and fastened with the included binders. The height of the underroof tensioners varies from 72 mm to 95 mm.



Type 95
95 mm x 50 mm
For 32 mm roof batten



Type 72
72 mm x 50 mm
For 25 mm roof batten

Tekniske specifikationer

Material	Foam material based on synthetic rubber (elastomer)
Temperature resistance	-50 °C to +105 °C
Storage temperature	Dry at relatively normal humidity (50% - 70%) and temperature range 0 °C to +35 °C

Type	Size	Content per box	DAFA no.	EAN no.
Type 72	72 x 50 mm	200 pcs.	620045547	5705636270692
Type 95	95 x 50 mm	100 pcs.	250000032	5705636214283

