

# RooFoil 200

Declaration of Performance acc. to EU 305/2011

| Declaration of Performance no. 10/2013: R2 27-08-2026                                                  |                                                                                                                        |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 1. Product type:                                                                                       | RooFoil 200                                                                                                            |
| 2. Identification of the product                                                                       | Lot no. – see packaging                                                                                                |
| 3. Intended use or uses of the product                                                                 | Flexible sheets for waterproofing - Definitions and characteristics of underlays - Underlays for discontinuous roofing |
| 4. Name and contact address of the manufacturer                                                        | DAFA A/S<br>Holmstrupgaardvej 12, DK-8220 Brabrand                                                                     |
| 5. Authorised representative                                                                           | N/A                                                                                                                    |
| 6. AVCP: System of assessment and verification of constancy of performance of the construction product | System 3                                                                                                               |
| 7. Notified body (hEN)                                                                                 | 1434                                                                                                                   |
| 8. Notified body (ETA)                                                                                 | N/A                                                                                                                    |

## 9. Declared performance Harmonised technical specification EN 13859-1:2010, EN 13859-2:2010

| ESSENTIAL CHARACTERISTICS                           | METHOD          | UNIT   | PERFORMANCE         |
|-----------------------------------------------------|-----------------|--------|---------------------|
| Reaction to fire                                    |                 | Class  | E                   |
| Water-resistance before and after artificial ageing |                 | Class  | W1                  |
| Dimensional stability, MD/CD                        |                 | %      | ± 3 / ±1            |
| Tensile resistance, before artificial ageing MD     |                 | N/50mm | 420 ± 70            |
| Tensile resistance, before the artificial ageing CD |                 | N/50mm | 270 ± 50            |
| Tensile resistance, after artificial ageing MD      |                 | N/50mm | 400 ± 60            |
| Tensile resistance, after artificial ageing CD      | EN 13859-1:2010 | N/50mm | 230 ± 40            |
| Elongation at rupture, before artificial ageing, MD | EN 13859-2:2010 | %      | 80 ± 30             |
| Elongation at rupture, before artificial ageing, CD |                 | %      | 90 ± 30             |
| Elongation at rupture, after artificial ageing, MD  |                 | %      | 50 ± 20             |
| Elongation at rupture, after artificial ageing, CD  |                 | %      | 60 ± 20             |
| Resistance to tearing, MD/CD                        |                 | N      | 250 ± 70            |
| Flexibility at low temperatures                     |                 | °C     | -30                 |
| Water vapour transmission properties (Sd)           |                 | m      | 0,03 (+0,04; -0,01) |



# RooFoil 200

Declaration of Performance acc. to EU 305/2011

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9


This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4

Signed for and on behalf of the manufacturer by:

Brabrand, 24-08-2026

**Joselyn Troncoso**

Group Chief Quality Officer

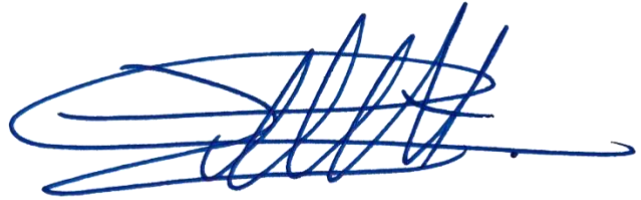

---

