

DAFA roof decking tensioners



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

The new DAFA roof decking tensioners are a part of DAFA AirVent System and are flexible, simple and quick to install.

Application

DAFA roof decking tensioners are used to tighten all kinds of flexible roof decking to prevent it from rattling in windy weather. This prevents wear to the roof decking and reduces wind noise.

The material

DAFA roof decking tensioners are made from flexible, non-absorbent and UV-resistant blue PE foam.

Normally 1-2 pieces are used per m², equivalent to every other lath.

- New optimized universal size
- Lath recess of 65 mm ensures excellent adhesion to standard laths
- Mounted without the use of strips and other tools.
- Great time saving on the roof

Transport, delivery and storage


DAFA roof decking tensioners are supplied in boxes of 136 pieces. It also comes with a handy bag to ensure easy handling on the roof.

DAFA roof decking tensioners must be stored in the box until use and must be protected against the weather and direct sunlight.



Installation

DAFA roof decking tensioners are flexible and clamp to the underside of the roof laths without needing to use tools or binding agents.

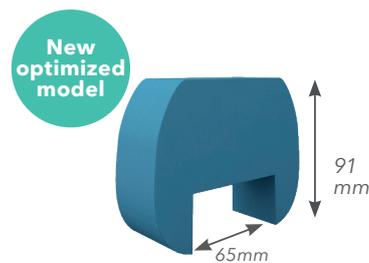

Advantages of the bag

- Can be reused again and again.
- Used if necessary for construction waste
- Secure solution with approved safety clip
- Easy handling on the roof, compared to cardboard boxes

Information

Material	Polyethylene foam
Temperature resistance	-50 °C to +80 °C (+90 °C max)
Storage temperature	Dry at relatively normal humidity (50% - 70%) and temperature range (0 °C to +35 °C)
DAFA item no.	620044387
EAN no.	5705636500225

