

DAFA UV tape

DAFA UV tape is a part of DAFA Radon System and is perfect for taping radon membranes.

Application

DAFA UV tape is used for sealing radon membranes. It is particularly suitable for outdoor use during difficult working and building conditions.

Suitable for taping:

- Overlap on radon membranes
- Repairs of radon membranes
- Difficult radon membranes joints

Material

DAFA UV tape is a single-sided acrylic tape. It has exceptional strength and adhesive properties.

DAFA UV tape withstands direct sunlight, periodic heavy rain, moisture and large temperature fluctuations without losing its adhesive properties.

Advantage

DAFA UV tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings.

Transport, delivery and storage

DAFA UV tape must be stored in the box until use, protected from weather and direct sunlight.

Contents

Pr. box


10 ruller á 25 m (60 mm x 25 m)

6 ruller á 25 m (100 mm x 25 m)

Measures

60 mm x 25 m

100 mm x 25 m

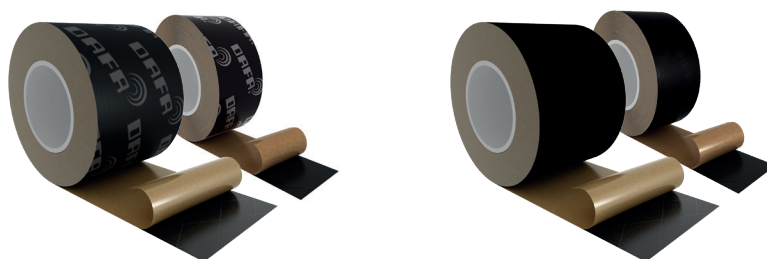

DAFA UV tape with and without logo - for taping DAFA Radon barrier foil

Color/dimension	Contents per box	DAFA item no.	EAN no.
Black 60 mm	10 rolls of 25 m	620016905	5705636360164
Black 60 mm no logo	10 rolls of 25 m	620026334	5705636425115
Black 100 mm	6 rolls of 25 m	620025138	5705636413778
Black 100 mm no logo	6 rolls of 25 m	620026300	5705636420523

Technical specifications

Thickness, foil + adhesive	(Without liner) 0,30-0,33 mm (DIN EN 1942)
Grammage	230-250 g/m ² (DIN EN ISO 536)
Peel-value	30 N/25 mm (DIN EN 1939)
Installation	Surfaces must be dry and free of dust and oil. Recommended installation temperature from +5 °C
Temperature resistance	-40 °C to +80 °C
Additional properties	APEO / solvent free and water based
Liner	Silicone paper, brown 90g/m ²



Eurofins-certification A+

01/2021

