

# Product catalog

DAFA Building Solutions A/S

EN/MAY 2024

NEW



Download EPD for DAFA's products here:  
[www.dafa-build.com/en/epd](http://www.dafa-build.com/en/epd)  
or scan the QR code



## DAFA AirStop System®

Complete range of vapor barriers for interior sealing



## DAFA AirVent System®

Wind barriers and roof underlays for sealing and ventilating roofs and exterior walls



## DAFA Radon System™

Complete system for protection against harmful radon gas



## Sealing systems

Proven joint sealing tape for windows, doors and joints



## DAFA Facade Kit™

Seals structures, absorbs vibrations and protects materials



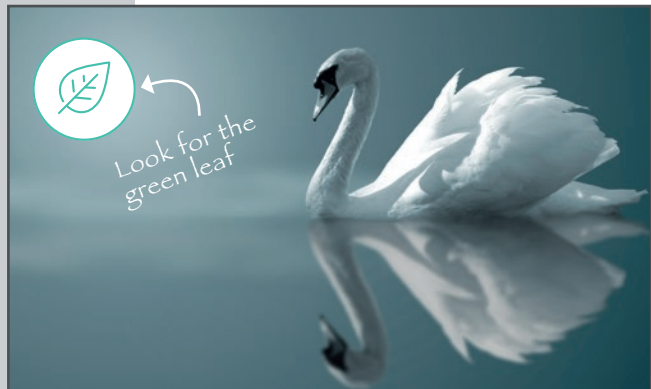
## Glass, window and door sealing

Strong systems for new and old doors and windows

## Products for environmentally approved buildings

An eco-friendly building is good for the environment and for the people who will be spending time in the building. It meets strict requirements throughout its entire life cycle, and has low energy consumption and a good indoor climate. Building materials and chemical products also meet strict requirements regarding substances that are harmful to the environment and health. Read more at:

[dafa-build.com/en/sustainability](https://dafa-build.com/en/sustainability)



## DGNB-certified construction with DAFA Building Solutions

As a member of Green Building Council Denmark - the construction industry's member organization for DGNB-certified construction in Denmark - our documentation is based on the latest 2020 DGNB manual for new buildings and extensive renovation. Most DAFA products can be used in DGNB construction. You can download all declarations from our website:

[dafa-build.com/en/dgnb](https://dafa-build.com/en/dgnb)



## Valuable information for correct design

DAFA's products are documented with product and data sheets where you will find all technical information and specifications.

Go to: [dafa-build.com/en/downloads](https://dafa-build.com/en/downloads)

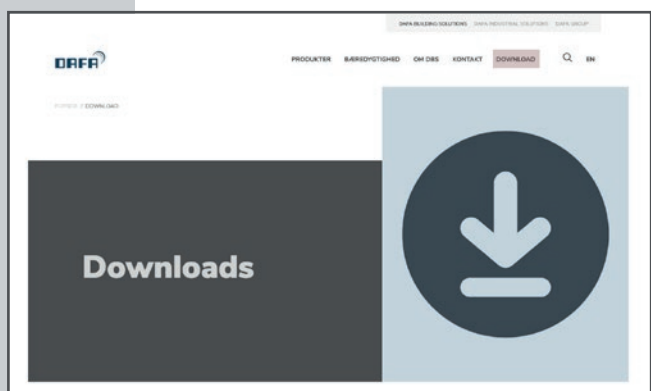


## Professional guides ensure efficient installation

DAFA provides complete installation instructions. These are available via our website, and are in some cases delivered with the products to the construction site.

For example, accessories for the AirStop, AirVent and Radon systems come with simple and clear drawings that show step-by-step installation.

Find it all at [dafa-build.com/en/downloads](https://dafa-build.com/en/downloads)



## Table of contents




**DAFA AirStop System®**  
Complete range of vapor barriers for interior sealing




**DAFA AirVent System®**  
Wind barriers and roof underlays for sealing and ventilating roofs and exterior walls




**DAFA Radon System™**  
Complete system to protect against radon gas



**DAFA sealing products**  
Proven joint sealing tape for windows, doors and joints



**DAFA Facade Kit**  
Seals structures, absorbs vibrations and protects materials



**Glass, window and door sealing**  
Strong systems for new and old doors and windows



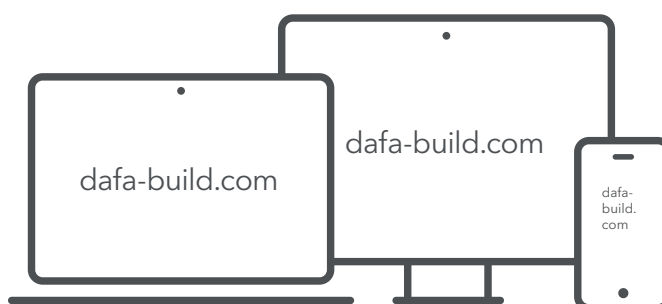
Follow DAFA Building Solutions on LinkedIn

[linkedin.com/showcase/dafa-building-solutions](https://www.linkedin.com/showcase/dafa-building-solutions)




Follow DAFA Building Solutions on Facebook

[facebook.com/dafa.byg](https://www.facebook.com/dafa.byg)



# DAFA AirStop System®

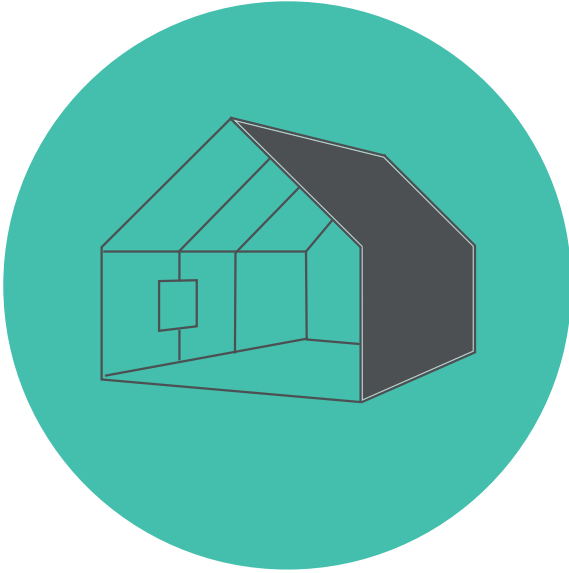- for sustainable construction



## DAFA AirStop System®

- vapor barrier that seals all areas...

DAFA AirStop System is the most effective and reliable sealing system for vapor barriers. A product series that supports sustainable construction and reduces energy consumption, to the benefit of the environment.

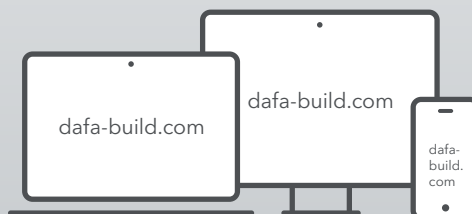
## DAFA performance and product warranty

DAFA AirStop System is a proven solution. A very attractive performance and product warranty of 15 or 30 years is therefore offered.\*

*\*The 15-30 year warranty applies only to the Scandinavian countries*






## [dafa-build.com/en/airstop](https://dafa-build.com/en/airstop)

Get information wherever you are. Access to information from DAFA has become even easier. Our website has been optimized. This includes making it mobile-phone-friendly, so you can easily search via your mobile phone.



## DAFA vapor barrier foil

DAFA's vapor barrier foils are designed for various applications depending on the type of building and the project requirements. The different colors make it easy to recognize the products. This ensures you always work with the right vapor barrier foil for the given task.

Illustration	DB no.	DAFA no.	EAN no.	Product text/roll width/ thickness/length	Number of rolls per pallet/m <sup>2</sup> per pallet	Advantages
<b>Performance foil</b> 	2042039 2110188	620035141 620038158	5705636464824 5705636479354	<b>DAFA ExFoil™</b> 2.15 m x 46.5 m x 0.20 mm 2.70 m x 37 m x 0.20 mm	25 rolls/2500 m <sup>2</sup> 25 rolls/2500 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Vapor barrier of the future</li> <li>Three layers and reinforcing mesh ensure high tear resistance and strength</li> <li>Faster installation than traditional PE foils</li> <li>BIM objects for Revit can be downloaded from our website</li> <li>DAFA ExFoil is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls.</li> </ul>
<b>PE foil</b> 	1343811 1845607  1921603  1602184 1845610  1985137	620014522 620027187  620030320  620022019 620027188  620029447	5705636344645 5705636426471  5705636444543  5705636394664 5705636426488  5705636440668	<b>DAFA ProFoil™</b> 2 m x 50 m x 0.20 mm 2.15 m x 46.5 m x 0.20 mm  3 m x 33.3 m x 0.20 mm  4 m x 25 m x 0.20 mm 4.15 m x 24.1 m x 0.20 mm  * 6 m x 25 m x 0.20 mm	50 rolls/5000 m <sup>2</sup> 50 rolls/5000 m <sup>2</sup>  50 rolls/5000 m <sup>2</sup>  50 rolls/5000 m <sup>2</sup> 50 rolls/5000 m <sup>2</sup>  33 rolls/4950 m <sup>2</sup>	<ul style="list-style-type: none"> <li>100% pure (virgin) polyethylene (PE) foil in all 3 layers</li> <li>High tensile and tear strength, despite being only 0.20 mm thick</li> <li>CE marked</li> <li>DAFA ProFoil is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls.</li> </ul>
<b>PE foil</b> 	1343810 1845603  1602180 1845605  2409713	620014175 620027184  620022022 620027186  620048197	5705636342245 5705636426457  5705636394695 5705636426464  5705636271026	<b>DAFA EcoFoil™</b> 2 m x 50 m x 0.20 mm 2.15 m x 46.5 m x 0.20 mm  4 m x 25 m x 0.20 mm 4.15 m x 24.1 m x 0.20 mm  500 mm x 100 m x 0,20 mm	50 rolls/5000 m <sup>2</sup> 50 rolls/5000 m <sup>2</sup>  50 rolls/5000 m <sup>2</sup> 50 rolls/5000 m <sup>2</sup>  92 rolls /9200 m <sup>2</sup>	<ul style="list-style-type: none"> <li>100% regenerated polyethylene (PE) foil</li> <li>High tensile and tear strength, despite being only 0.20 mm thick</li> <li>CE marked</li> <li>DAFA EcoFoil is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>
<b>Moisture-adaptive vapor barrier</b> 	1822986	620026581	5705636422312	<b>DAFA HiFoil™</b> 1.5 m x 50 m x 0.20 mm	30 rolls/2250 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Moisture-adaptive vapor barrier with variable water vapor diffusion resistance</li> <li>Used for holiday homes, roof renovation from the outside, roof elements/cassettes</li> <li>CE marked</li> <li>DAFA HiFoil listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>
<b>Vapor diffusion retarder</b> 	1822985	620026579	5705636422305	<b>DAFA DiFoil™</b> 1.5 m x 50 m x 0.20 mm	30 rolls/2250 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Vapor-permeable vapor diffusion retarder</li> <li>Polyethylene (PE) membrane with a moisture-absorbing polypropylene (PP) fleece layer</li> <li>CE marked</li> <li>Particularly suitable for holiday homes</li> <li>DAFA DiFoil listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>

\* Special order. Delivery time at least 9 weeks. Min. order 330 rolls.

# DAFA ExFoil™

## - reinforced vapor barrier

A strong new vapor barrier with reinforcing mesh. Much easier to work with than a regular PE vapor barrier, for easier installation and better results.

### The new generation vapor barrier!

DAFA ExFoil vapor barrier foil is used as a vapor and moisture barrier in building structures. The multilayer structure with mesh reinforcement ensures an extremely stretch and tear-resistant vapor barrier foil.


#### DAFA ExFoil offers the following advantages:

- Far more construction-friendly than a standard PE vapor barrier, making installation easier
- With reinforcing mesh, DAFA ExFoil is much stronger than a PE vapor barrier
- Better safety during installation
- Can be nailed and has high tensile and tear strength
- Can be joined/taped without a solid surface underneath\*
- DAFA ExFoil listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings

For DAFA ExFoil™ we recommend the following accessories:



DAFA Hi-tack® tape  
See page 8.



DAFA Hi-tack® pipe  
and cable collar

See page 10.



DAFA foil  
adhesive  
See page 9.



DAFA ExFoil  
lining foil  
See page 11.



DAFA ExFoil sill foil  
See page 12.

\* See the DAFA AirStop installation instructions at [www.dafa-build.com](http://www.dafa-build.com)



NEW



The image contains the EPD logo, which consists of a green circular arrow icon above the letters 'epd' in a green sans-serif font. To the right of the logo is a standard black and white QR code.

Download EPD for DAFA ExFoil here:  
[www.dafa-build.com/en/epd](http://www.dafa-build.com/en/epd)  
or scan the QR code



DAFA ExFoil consists of Polyethylene (PE) membrane, reinforcing mesh in the middle and a layer of moisture-absorbing Polypropylene (PP) fleece. The material can withstand direct sunlight for up to three months, and must not be exposed to direct contact with wood preservative with added solvents.

## DAFA vapor barrier tape


Vapor barrier tape is used for indoor joins in all PP/PE membrane types, plywood, chipboard, planed wood and metal. DAFA vapor barrier tape is a strongly adhesive tape which should **only** be used in permanent applications, as the tape **cannot** be removed from the surface again.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
 <p>epd</p> <p>A+</p>	5243912 5243913  1897462 1897458	620006596 620005987  620023654 620014093	5705636284484 5705636266459  5705636404110 5705636341699	<b>DAFA vapor barrier tape</b> 50 mm green 50 mm blue  100 mm green 100 mm blue	12 x 25 m rolls 12 x 25 m rolls  6 x 25 m rolls 6 x 25 m rolls	<ul style="list-style-type: none"> <li>Green is ideal for pipe penetrations and is flexible/stretchable</li> <li>Blue is ideal for longitudinal and transverse joins in membranes</li> <li>Recommended for PE foils (ProFoil and EcoFoil)</li> <li>Highly adhesive</li> <li>French VOC A+</li> <li>DAFA vapor barrier tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 <p>epd</p> <p>A+</p>	1822987 1822989	620026587 620026588	5705636422367 5705636422374	<b>DAFA Hi-tack® tape</b> 60 mm lime 60 mm gray	10 x 25 m rolls 10 x 25 m rolls	<ul style="list-style-type: none"> <li>Lime is ideal for pipe penetrations and is flexible/stretchable</li> <li>Gray is ideal for longitudinal and transverse joins in membranes</li> <li>Recommended for ExFoil, HiFoil and DiFoil</li> <li>Highly adhesive</li> <li>French VOC A+</li> <li>DAFA Hi-tack® is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 <p>epd</p> <p>A+</p>	1984833  1984837	620022979  620026531	5705636447773  5705636422015	<b>DAFA fleece tape with split liner (50/50)</b> 60 mm x 25 m  *100 mm x 25 m	10 x 25 m rolls  6 x 25 m rolls	<ul style="list-style-type: none"> <li>Can be used for sealing joints in underlays and vapor and wind barriers</li> <li>Vapor-permeable</li> <li>Unique adhesiveness to multiple surfaces such as plywood, chipboard and membrane</li> <li>The tape can also be filled and plastered over, making it particularly suitable for windows, exterior walls, etc.</li> <li>Split liner for quick and easy installation</li> <li>DAFA fleece tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
* Special order. Delivery time at least 6 weeks. Min. order 240 rolls.						
 <p>epd</p> <p>A+</p>	1377534	620015189	5705636349312	<b>Double sided vapor barrier tape</b> 30 mm	12 x 25 m rolls	<ul style="list-style-type: none"> <li>Ideal for adhesion of vapor barrier to steel structures</li> <li>Provides full adhesion at points of overlap.</li> <li>Approved for installation of vapor barrier foil under DS/EN 13984</li> <li>French VOC A+</li> <li>DAFA double-sided vapor barrier tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 <p>NEW</p> <p>epd</p> <p>A+</p> <p>DAFA Zero Waste is designed <b>without</b> tape liner.</p>	2349365	620045394	5705636270654	<b>DAFA Zero Waste universal tape</b> 25 m x 60 mm	10 rolls	<ul style="list-style-type: none"> <li>Reduces waste on the construction site</li> <li>No liner means faster installation</li> <li>Tearable - no tools required</li> <li>No tape waste or clean-up after installation</li> <li>Same tape, inside and out, for the roof, facade, and vapor barrier</li> <li>DAFA Zero Waste is included in the Nordic Ecolabelling database of construction products that can be used in Swan-labelled buildings.</li> <li>Product-specific EPD is available for download</li> </ul>




## DAFA Multi Sealing™

DAFA Multi Sealing is an extruded special butyl sealing tape coated with stretch foil.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box/roll	Advantages
	1382576	620015438	5705636351131	1.5 x 50 mm	8 x 5 m rolls	<ul style="list-style-type: none"> <li>Adheres strongly to most building materials</li> <li>Solvent-free</li> <li>Does not dry out</li> <li>Maintains elasticity</li> <li>Very durable</li> <li>Does not contain harmful substances</li> <li>DAFA Multi Sealing is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA foil adhesive


Used to create airtight bonds between vapor barrier and moisture barrier/building elements with absorbent surfaces, such as render, concrete or untreated wood.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	1342380	620014510	5705636344560	DAFA foil adhesive Tube 310 ml	20 pcs	<ul style="list-style-type: none"> <li>Installation down to -10 °C</li> <li>Elastoplastic adhesive with an aqueous dispersion base</li> <li>Solvent-free</li> <li>Strong adhesion</li> <li>Smooths out unevenness</li> <li>Lasting adhesion</li> <li>Follows the movements of the building</li> <li>Used without counter-battens</li> <li>French VOC A+</li> <li>DAFA foil adhesive is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1342381	620014511	5705636344577	Bag 580 ml	20 pcs	

## DAFA SprayBarrier™

DAFA SprayBarrier is a sprayable liquid vapor barrier used in places where it is very difficult to seal using a traditional vapor barrier.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	2358833	620045923	5705636270739	DAFA SprayBarrier Bag 600 ml	20 bags.	<ul style="list-style-type: none"> <li>Saves time</li> <li>Very easy to handle and apply</li> <li>Easy sealing for complex joints</li> <li>Can be sprayed, caulked or brushed on</li> <li>Permanently elastic</li> <li>Free of solvents, isocyanate, and silicone</li> <li>May be applied to damp surfaces</li> <li>Extremely low values when tested for airtightness</li> <li>GEV-Emicode EC1 Plus</li> </ul>
	2358834	620045924	5705636270746	Spray gun	1 pcs.	





## DAFA universal pipe and cable collar

DAFA universal pipe collars are used to seal around both round and rectangular pipe penetrations. DAFA universal cable collars are used to seal around cable and ceiling outlet penetrations. The patented solutions give you optimal certainty about the vapor barrier.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
	5378422	620010116	5705636310411	<b>Type 260</b> 260 × 260 mm	Ø15 to Ø110 mm	50 pcs	<ul style="list-style-type: none"> <li>Patented solution</li> <li>Flexible EPDM material</li> <li>Pipe collars fit dimensions from Ø15 to Ø400 mm</li> <li>Coated with strong acrylic adhesive</li> <li>Simple, fast and safe installation</li> <li>No special tools required</li> <li>Pre-punched markings</li> <li>DAFA universal pipe and cable collars are listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	5298186	620007467	5705636288826	<b>Type 345</b> 345 × 345 mm	Ø80 to Ø200 mm Square - 100 × 150 mm 150 × 150 mm	50 pcs	
	1271881	620012271	5705636329611	<b>Type 520</b> 520 × 520 mm	Ø200 to Ø400 mm	25 pcs	
	5298187	620007468	5705636288833	<b>Cable collar</b> <b>Type 195</b> 195 × 195 mm	PL ceiling box Ø80 mm or Cables 4 pcs - Ø7 to Ø10 mm 2 pcs - Ø7 to Ø22 mm	50 pcs	<ul style="list-style-type: none"> <li>NOTE: When installing square pipes, seal with DAFA green DSP and pipe and collar.</li> </ul>
		2344467	620045079	5705636502687	<b>Cable collar</b> <b>Type 115</b> Ø115 mm	Cables from Ø7 mm to Ø35 mm	50 pcs


## DAFA Hi-tack® universal pipe and cable collar

DAFA Hi-tack® universal pipe and cable collars are used to seal around penetrations involving round and square pipes, cables and ceiling outlets.

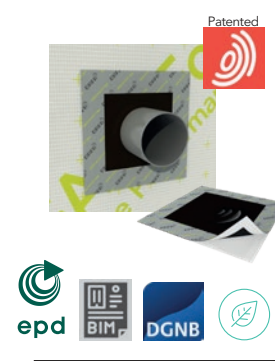Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
	1837293	620026737	5705636425436	<b>DAFA Hi-tack® pipe collar</b> <b>Type 260</b> 260 × 260 mm	Round pipes Ø15 to Ø110 mm	25 pcs	<ul style="list-style-type: none"> <li>Recommended for DAFA HiFoil, DiFoil and ExFoil</li> <li>Patented solution</li> <li>Flexible EPDM material</li> <li>Pipe collars fit dimensions from Ø15 to Ø400 mm</li> <li>Coated with strong acrylic adhesive</li> <li>Simple, fast and safe installation</li> <li>No special tools required</li> <li>Pre-punched markings</li> <li>BIM objects for Revit can be downloaded from our website</li> </ul>
	1837295	620027032	5705636425429	<b>Type 345</b> 345 × 345 mm	Round pipes Ø80 to Ø200 mm and square pipes 100 × 150 mm and 150 × 150 mm	25 pcs	
	1837294	620026738	5705636425443	<b>DAFA Hi-tack® cable collar</b> <b>Type 195</b> 195 × 195 mm	PL ceiling box Ø80 mm or Cables 4 pcs - Ø7 to Ø10 mm 2 pcs - Ø7 to Ø22 mm	25 pcs	<ul style="list-style-type: none"> <li>Hi-tack® universal pipe and cable collars are listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: When installing square pipes, seal with DAFA Hi-tack® tape between the pipe and collar.</li> </ul>



## DAFA Renovation Collar

DAFA Renovation Collars are used for air-tight sealing of the climate envelope in the event of penetrations of existing pipes and cables during renovation tasks.

Illustration	DB no.	DAFA no.	EAN no.	Type	Dimensions	Contents per box	Advantages
	2404592 2404593 2404594 2404595	620046279 620046277 620046278 620047766	5705636532899 5705636532875 5705636532882 5705636535944	Ø115 mm Ø160 mm Ø250 mm Ø300 mm	For cables / pipes from Ø5 to Ø20 mm Ø30 to Ø50 mm Ø80 to Ø125 mm Ø140 to Ø180 mm	25 pcs. 25 pcs. 25 pcs. 25 pcs.	<ul style="list-style-type: none"> <li>• Specifically designed for sealing tasks in renovation projects.</li> <li>• Self-vulcanizing</li> <li>• Extremely stretchable</li> <li>• Energy-saving due to tight penetrations/joints</li> <li>• Only one flexible packing for common pipe dimensions / exhaust channels</li> <li>• Mounted without the use of sealant, glue, grouting, etc.</li> </ul>



## DAFA ExFoil lining foil

DAFA ExFoil lining foil is used for interior sealing when installing windows and doors. The PE foil ensures a vapor-tight solution in the construction.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions (width)	Contents per box/roll	Advantages
	2084543 2084544 2084545	620036874 620036875 620036584	5705636473277 5705636473284 5705636471518	<b>Butyl/Tape</b> 200 mm 300 mm 400 mm	1 x 50 m roll 1 x 50 m roll 1 x 50 m roll	<ul style="list-style-type: none"> <li>• Made of ExFoil foil with reinforcing mesh</li> <li>• Can be nailed and has high tensile and tear strength</li> <li>• Pre-fitted with butyl and tape</li> <li>• Simple, fast and safe installation</li> <li>• Adheres to most building materials</li> <li>• BIM objects for Revit can be downloaded from our website</li> </ul>
	2084541 2084542	620036876 620036582	5705636473260 5705636471488	<b>Tape/Tape</b> 250 mm 410 mm	1 x 50 m roll 1 x 50 m roll	<ul style="list-style-type: none"> <li>• Made of ExFoil foil with reinforcing mesh</li> <li>• Can be nailed and has high tensile and tear strength</li> <li>• Pre-fitted with butyl and tape</li> <li>• Simple, fast and safe installation</li> <li>• Adheres to most building materials</li> <li>• BIM objects for Revit can be downloaded from our website</li> </ul>


## DAFA PE lining foil

DAFA PE lining foil is used for interior sealing when installing windows and doors. The PE foil ensures a vapor-tight solution in the construction.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions (width)	Contents per box/roll	Advantages
	1447409 1342637 1342641	620016196 620014198 620014507	5705636358208 5705636342382 5705636344546	<b>Blue roll</b> 200 mm 300 mm 400 mm	1 x 50 m roll 1 x 50 m roll 1 x 50 m roll	<ul style="list-style-type: none"> <li>• 0.2 mm PE foil</li> <li>• High tensile strength and partially tear-resistant</li> <li>• Fitted with butyl and tape</li> <li>• Simple, fast and safe installation</li> <li>• Adheres to most building materials</li> <li>• French VOC A+</li> <li>• DAFA PE lining foil (green roll) is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1915142 1342642	620020906 620014508	5705636387307 5705636344553	<b>Green roll</b> 250 mm 410 mm	1 x 50 m roll 1 x 50 m roll	<ul style="list-style-type: none"> <li>• 0.2 mm PE foil</li> <li>• High tensile strength and partially tear-resistant</li> <li>• Fitted with butyl and tape</li> <li>• Simple, fast and safe installation</li> <li>• Adheres to most building materials</li> <li>• French VOC A+</li> <li>• DAFA PE lining foil (green roll) is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

## DAFA Duo Foil lining foil

Duo Foil makes it easy to caulk properly, so that the insulation material is protected. This ensures the necessary ventilation of the structure and helps prevent rot or dry rot forming.

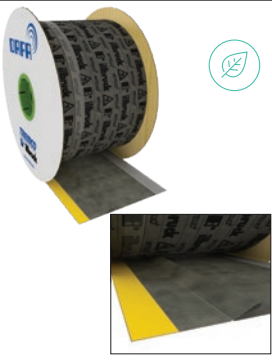
Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box/roll	Advantages
	5347476 5347414 5346953	620009838 620009839 620009840	5705636308661 5705636308676 5705636308685	*130 - 160 mm **180 - 210 mm 220 - 250 mm	3 x 50 m rolls 2 x 50 m rolls 1 x 50 m roll	<ul style="list-style-type: none"> <li>Intelligent foil membrane</li> <li>Adhesive on both sides</li> <li>Flexible width due to fold</li> <li>Helps prevent mold developing</li> <li>Keeps moisture out of the structure</li> <li>DAFA Duo Foil lining foil is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

\* Special order. Min. order 2,700 m

\*\* Special order. Min. order 1,800 m



## DAFA ExFoil sill foil

Used to seal between a top frame and an existing building element. Can also be used to fill gaps when installing DAFA ExFoil vapor barrier.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box/roll	Advantages
	2094310 2094311	620037331 620037332	5705636475455 5705636475462	<b>ExFoil sill foil</b> 500 mm 1050 mm	4 x 50 m rolls 1 x 50 m roll	<ul style="list-style-type: none"> <li>DAFA ExFoil sill foil is far more construction-friendly than normal PE foil</li> <li>With the reinforcing mesh, DAFA ExFoil sill foil is far stronger than a PE foil</li> <li>Better safety during installation</li> <li>Can be nailed and has high tensile and tear strength</li> </ul>


## DAFA corners

DAFA corners are used for sealing in challenging areas of the vapor barrier. DAFA corners are designed specially for interior and exterior corners and ensure a fully airtight seal.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	1305702	620013402	5705636337036	<b>Outside corner</b> 150 x 150 mm	50 pcs	<ul style="list-style-type: none"> <li>0.2 mm PE foil</li> <li>Foldable, saving a lot of space and providing easier handling</li> <li>Quick and easy installation</li> <li>Flexible</li> <li>Unique design</li> <li>With punched fold line</li> <li>DAFA corners is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1305703	620013403	5705636337029	<b>Inside corner</b> 150 x 150 mm	50 pcs	


## DAFA rafter shoe collar

Rafter shoe collars are used in 1½-story homes around collar beams and similar rafter structures to ensure optimal sealing at the vapor barrier.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	1271886	620011476	5705636326320	45 mm x 190 mm/245 mm	40 pcs	<ul style="list-style-type: none"> <li>• 2K-cast collar with flexible sealing lip</li> <li>• Can be trimmed as needed</li> <li>• The collar has double adhesive on both sides.</li> <li>• French VOC A+</li> </ul>


## DAFA universal primer

Use DAFA universal primer where sufficient adhesion to the surface cannot be achieved using DAFA adhesive or vapor barrier tape etc. It is recommended that primer be used on absorbent surfaces such as bricks, concrete, aerated concrete, natural stone, etc.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	1984522	620033110	5705636456522	<b>DAFA universal primer</b> 500 ml	12 pcs	<ul style="list-style-type: none"> <li>• Swivel spray function, easy to apply</li> <li>• Enhances adhesion</li> <li>• Quick-drying</li> <li>• Transparent</li> <li>• DAFA universal primer is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA water-based primer

Use DAFA water-based primer where sufficient adhesion to the surface cannot be achieved using DAFA adhesive or vapor barrier tape etc. It is recommended that primer be used on absorbent surfaces such as bricks, concrete, aerated concrete, natural stone, etc.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	2093684	620037504	5705636476483	<b>DAFA water-based primer</b> 1000 ml	6 bottles	<ul style="list-style-type: none"> <li>• Water based and solvent free</li> <li>• Enhances adhesion</li> <li>• Changes color when cured</li> <li>• Can be removed with water before curing</li> <li>• Good water resistance after curing</li> <li>• GEV-EMICODE® <b>EC1 PLUS</b></li> <li>• DAFA water-based primer is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA foil spatula

When you tape your joints, remember to massage the tape into the vapor barrier using a spatula. If you do not use the spatula, about 30-40% of the tape will not be firmly stuck to the surface, and there is a risk it may fall off after 6-10 years.

Illustration	DB no.	DAFA no.	EAN no.	Contents per box	Advantages
	2108778	620037016	5705636478968	25 pcs	<ul style="list-style-type: none"> <li>• Ensures that the vapor barrier tape stays in place long term</li> <li>• Achieves a better seal</li> </ul>


## DAFA IsoBatt™

DAFA IsoBatts are used as separators between the existing structure and the vapor barrier, e.g. during renovation projects.

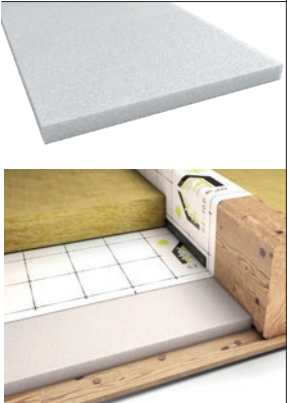Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per pallet	Advantages
	1863430	620027541	5705636429083	1000 x 1000 x 25 mm	32 pcs	<ul style="list-style-type: none"> <li>• Can be used with DAFA HiFoil™ Moisture-adaptive vapor barrier</li> <li>• Easy to trim</li> <li>• Protects the vapor barrier</li> <li>• Very easy to handle</li> <li>• Reduces dust problems</li> </ul>

## DAFA counter-batten

DAFA counter-battens are specially designed for installation in connection with renovating and re-insulating roof structures.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	1863371	620027282	5705636429069	3 mm x 30 mm x 1220 mm	150 pcs	<ul style="list-style-type: none"> <li>• Can be used with DAFA HiFoil™ Moisture-adaptive vapor barrier</li> <li>• Easy to trim by scoring the batten and then breaking it off</li> <li>• Can be affixed with staples</li> </ul>

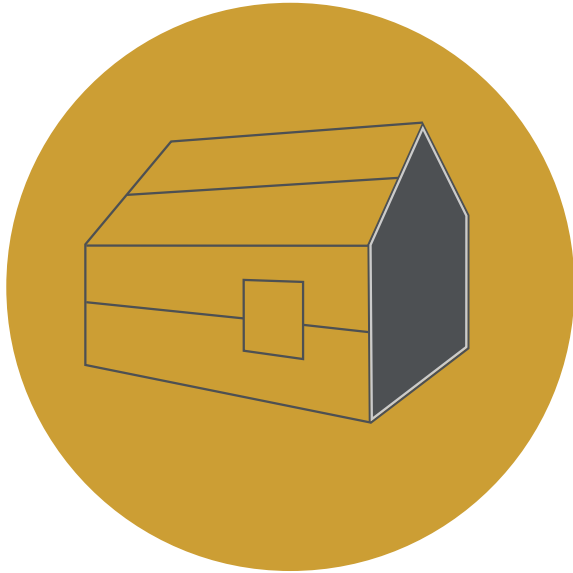
## The roof structure that allows re-insulation from the outside

### Using DAFA HiFoil, you can establish the vapor barrier from above when renovating a roof.

Remove the existing insulation and any non-airtight vapor barrier and lay DAFA IsoBatts to protect the DAFA HiFoil from projecting nails and screws. Lay the DAFA HiFoil flat against the DAFA IsoBatts and over the existing rafters. Affix the foil to the rafters using DAFA edge protection profiles. Then place the new insulation between the rafters.

The result is a new airtight vapor barrier and a new roof without major additional costs.





## DAFA AirVent System® -airtight roofs and exterior walls

### DAFA AirVent System®

A complete range of permeable roof underlay and wind barrier solutions for ventilated structures.

DAFA AirVent System is made up of thought-out solutions based on proven products for sealing building envelopes - both roofs and exterior walls. Products that work and that make it simple and easy.

#### DAFA performance and product warranty

DAFA AirVent System is a proven solution. A very attractive performance and product warranty of 15 or 30 years is therefore offered.\*

*\*The 15-30 year warranty applies only to the Scandinavian countries*

### [dafa-build.com/en/airvent](https://dafa-build.com/en/airvent)

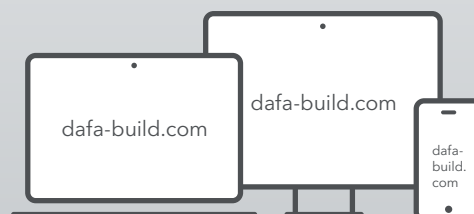
Get information wherever you are. Access to information from DAFA has become even easier. Our website has been optimized. This includes making it mobile-phone-friendly, so you can easily search via your mobile phone.



Facebook  
[@dafa.byg](https://www.facebook.com/dafa.byg)



LinkedIn  
[linkedin.com/showcase/dafa-building-solutions](https://www.linkedin.com/showcase/dafa-building-solutions)



# Strong product range

DAFA AirVent System is made up of strong foils and accessory products that make it simple and easy to seal roofs and exterior walls.



**DAFA RooFoil 150™**  
- DUKO class ML

DAFA RooFoil 150 is a strong vapor-permeable membrane that can be used as a roof underlay at gradients over 15 degrees, in ventilated and unventilated roof structures, and as a wind barrier in lightweight exterior wall structures.



**DAFA RooFoil 200™**  
- DUKO class ML

DAFA RooFoil 200 is a strong vapor-permeable membrane that can be used as a roof underlay at gradients over 15 degrees, in ventilated and unventilated roof structures, and as a wind barrier in lightweight exterior wall structures.



**DAFA RooFoil 230 MH™**  
- DUKO class MH (H)

DAFA RooFoil 230 MH is a strong vapor-permeable membrane featuring high tear resistance. It can be used as a roof underlay at gradients over 15 degrees, in ventilated and unventilated roof structures, and as a wind barrier in lightweight exterior wall structures.



**DAFA RooFoil 230 MH Plus™**  
- DUKO class MH (H)

Like DAFA RooFoil 230 MH, 230 MH Plus is a strong vapor-permeable membrane featuring high tear resistance. DAFA RooFoil 230 MH Plus has integrated self-adhesive edges on both sides at points of overlap.

## Key

	Class ML			Class MH			Class H normal
Roof covering	<b>Imitation roof tiles</b> - over 35° and at least 70 mm overlap <b>Diagonal, sheet or natural slate</b> - laid in putty <b>Metal sheets</b> - tiles, sheets	<b>Pantile</b> - over 35° and at least 70 mm overlap <b>Double pantile</b> - at least 35° and less than 70 mm overlap <b>Imitation roof tiles</b> - less than 35° and at least 70 mm overlap <b>Sheet or natural slate</b>		<b>Pantile</b> - less than 70 mm overlap <b>Pantile</b> - less than 35° and at least 70 mm overlap <b>Double pantile</b> - less than 35° and at least 70 mm overlap <b>Diagonal slate</b>			
① Complexity	High	High	Low	High	High	Low	High
② Climate impact and story height	Special	Normal	Special	Special	Normal	Special	Special
RooFoil 150	✓	X	X	X	X	X	X
RooFoil 200	✓	✓	✓	X	X	X	X
RooFoil 230 MH / Plus	✓	✓	✓	✓	✓	✓	✓

① High complexity, if:

- Many penetrations in close proximity
- Many details (valley gutters, dormers, ventilation ducts, chimneys and skylights)


② Special climate impact and story height, when:

- The home is outside any urban zone, surrounded by fields or sea
- The home has three stories or more
- The home is at the top of a hill, or at the end of a street






## DAFA roof decking

A range of strong, permeable foils for roof underlays and wind barriers. The foils meet the building regulation requirements for airtightness and can be used in new construction and renovation.

Illustration	DB no.	DAFA no.	EAN no.	Product text/width/length	Number of rolls per pallet/m <sup>2</sup> per pallet	Advantages
	1950686	620031982	5705636451855	<b>DAFA RooFoil 230 MH Plus™</b> 1.5 m x 50 m	24 rolls/1800 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Fitted with integrated self-adhesive edges on the front and back at points of overlap.</li> <li>DUKO MH and H standard rating (mounted on a solid surface)</li> <li>DAFA RooFoil 230 MH Plus™ is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>
	1822505 1822501	620026568 620026567	5705636422220 5705636422213	<b>DAFA RooFoil 230 MH™</b> 1.5 m x 50 m 1.1 m x 50 m	24 rolls/1800 m <sup>2</sup> 20 rolls/1100 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Strong material that can withstand strain</li> <li>DUKO MH and H standard rating (mounted on a solid surface)</li> <li>DAFA RooFoil 230 MH™ is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>
	1650689 1650692	620023105 620023115	5705636400624 5705636400587	<b>DAFA RooFoil 200™</b> 1.5 m x 50 m 1.1 m x 50 m	36 rolls/2700 m <sup>2</sup> 36 rolls/1980 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Can be used as a roof underlay and wind barrier</li> <li>DUKO ML rating</li> <li>DAFA RooFoil 200™ is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls.</li> </ul>
	1650688 1650690	620023104 620023114	5705636400556 5705636400570	<b>DAFA RooFoil 150™</b> 1.5 m x 50 m 1.1 m x 50 m	50 rolls/3750 m <sup>2</sup> 50 rolls/2750 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Can be used as a roof underlay and wind barrier</li> <li>DUKO ML rating</li> <li>DAFA RooFoil 150™ is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>



## DAFA wind barriers

A selection of strong permeable wind barriers. The foils meet the building regulation requirements for airtightness and can be used in new construction and renovation.

Illustration	DB product no.	DAFA product no.	EAN number	Product text	Contents per box	Advantages
	1916704	620029957	5705636443584	<b>DAFA WindFoil 130™</b> 3.05 m x 25 m	78 rolls/5947.5 m <sup>2</sup>	<ul style="list-style-type: none"> <li>A strong 3-layer permeable material</li> <li>Used as a wind barrier in ventilated, lightweight outer wall cladding</li> <li>DAFA WindFoil 95 is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>Roll width of 3.05 meters allows the wind barrier to be installed in full wall height</li> <li>NOTE: Min. order is 10 rolls</li> </ul>
	1550271	620020403	5705636384160	<b>DAFA WindFoil 95™</b> 1.5 m x 50 m	60 rolls/4500 m <sup>2</sup>	<ul style="list-style-type: none"> <li>A strong 4-layer permeable material</li> <li>Used as a wind barrier in ventilated, lightweight outer wall cladding</li> <li>DAFA WindFoil 95 is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>
	2311608	620043983	5705636270401	<b>DAFA WindFoil 210 UV FirePro™</b> 1.5 m x 50 m	30 rolls/2250 m <sup>2</sup>	<ul style="list-style-type: none"> <li>A strong permanently UV-resistant permeable material with fire retardant properties (B-s1,d2)</li> <li>Used for open exterior wall structures</li> <li>DAFA WindFoil 210 UV FirePro is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>NOTE: Min. order is 10 rolls</li> </ul>

## DAFA UV tape


DAFA UV tape is part of the DAFA AirVent System and is ideal for taping DAFA's roofing foils, wind barriers and wind panels.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	1438817 1897456	620016905 620025138	5705636360164 5705636413778	<b>DAFA UV tape</b> WITH logo 60 mm 100 mm	10 x 25 m rolls 6 x 25 m rolls	<ul style="list-style-type: none"> <li>• Approved for outdoor use</li> <li>• Can be used for all DAFA roof underlay and wind and vapor barriers</li> <li>• Flexible/stretchable</li> <li>• Highly adhesive</li> <li>• French VOC A+</li> <li>• DAFA UV tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul> 
	2392247	620047265	5705636270890	with split-liner 60 mm	10 x 25 m rolls	
	1836320 1984065	620026334 620026300	5705636425115 5705636420523	WITHOUT logo 60 mm 100 mm*	10 x 25 m rolls 6 x 25 m rolls	

\* Special order. Delivery time: at least 4 weeks. Min. order 270 rolls.


## DAFA Zero Waste® - universal tape without liner

DAFA Zero Waste is a strong universal tape with no tape liner. Used for vapor barriers, roofing foils and wind barriers.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	2349365	620045394	5705636270654	<b>DAFA Zero Waste universal tape</b> 25 m x 60 mm	10 rolls	<ul style="list-style-type: none"> <li>• Reduces waste on the construction site</li> <li>• No liner means faster installation</li> <li>• Tearable - no tools required</li> <li>• No tape waste or clean-up after installation</li> <li>• Same tape, inside and out, for the roof, facade, and vapor barrier</li> <li>• DAFA Zero Waste is included in the Nordic Ecolabelling database of construction products that can be used in Swan-labelled buildings.</li> <li>• Product-specific EPD is available for download</li> </ul>

## DAFA fleece tape with split-liner


With a unique, strongly adhesive glue that retains its adhesiveness at both lower and higher temperatures than ordinary tape. The tape can also be filled and plastered over, making it particularly suitable for windows, exterior walls, etc.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	1984833	620022979	5705636447773	<b>DAFA fleece tape with split liner (50/50)</b> 60 mm x 25 m	10 rolls	<ul style="list-style-type: none"> <li>• Can be used for sealing joints in underlays and vapor and wind barriers</li> <li>• Unique adhesiveness to multiple surfaces such as plywood, chipboard and membrane</li> <li>• The tape can be filled and plastered over, making it particularly suitable for windows, exterior walls, etc.</li> <li>• Split liner for quick and easy installation</li> <li>• DAFA fleece tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1984837	620026531	5705636422015	**100 mm x 25 m	6 rolls	

\*\* Special order. Delivery time at least 6 weeks. Min. order 240 rolls.


## DAFA counter-batten tape

DAFA counter-batten tape is used to seal between counter battens and roof underlay

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per box	Advantages
	1730868	620025389	5705636415857	<b>DAFA counter-batten tape</b> 0.8 x 40 mm	20 m	10 rolls	<ul style="list-style-type: none"> <li>• Withstands high temperatures</li> <li>• Excellent heat stability</li> <li>• Good form stability</li> <li>• Solvent-free</li> <li>• Self-vulcanizing</li> <li>• No need for special tools</li> </ul>

## Norton self-adhesive PVC strip



The type 2520 list is used to seal between roof sheets, preventing water, drifting snow and dirt from penetrating.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per box	Advantages
	5899725	232300031	5705636127668	<b>Type 2520</b> black	30 m	1140 m	<ul style="list-style-type: none"> <li>• Color: Black or gray (available in light gray as a special order)</li> <li>• Very soft and flexible</li> <li>• Self-adhesive on one side</li> <li>• Optimal seal achieved at 30% compression</li> <li>• Adheres to virtually any surface</li> <li>• We also stock softer or firmer variants</li> <li>• NB! The strip must not be stretched during installation</li> </ul>
	5899727	232301031	5705636121970	3.0 x 9 mm	20 m	800 m	
	5899728	232302031	5705636124025	*6.0 x 9 mm	15 m	570 m	
	5899729	232303031	5705636127712	10.0 x 9 mm	10 m	380 m	

\* Special order. Delivered to order. Min. order 1,140 m




## DAFA butyl tape

Used to affix roof underlay (foil) where it terminates along gutter aprons on the bottom edge of roofs.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per box	Advantages
 	2390350 2390349	620046600 620046599	5705636270852 5705636270845	<b>DAFA butyltape</b> 2 x 10 mm 2 x 25 mm	22,5 m 22,5 m	540 m 315 m	<ul style="list-style-type: none"> <li>• DAFA butyl tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> <li>• Color: Black</li> <li>• Weather resistant</li> <li>• Strong adhesion</li> <li>• Adhesive surfaces must be dry and free of dust</li> <li>• NB! When used during winter, the tape should be stored at room temperature until it is installed</li> </ul>


## DAFA universal outdoor adhesive

A permanent elastic sealant for affixing and gluing DAFA AirVent System foils and membranes such as DAFA wall membrane.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Quantity	Contents per box	Advantages
  	1828048	620026751	5705636423418	<b>DAFA universal outdoor adhesive</b> Bag	600 ml	12 pcs	<ul style="list-style-type: none"> <li>• A permanently elastic special adhesive rubber compound</li> <li>• Can be applied directly to roof underlays or wind barriers</li> <li>• Affixes foils to both porous and smooth surfaces</li> <li>• DAFA universal outdoor adhesive is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA UV pipe collar

DAFA UV pipe collar is a patented airtight solution for electrical boxes or cable conduits through roof underlays or wind barriers.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
	1558385	620019349	5705636387352	<b>DAFA UV pipe collar</b> Type 260 260 x 260 mm	Round pipes - Ø15 to Ø110 mm	50 pcs	<ul style="list-style-type: none"> <li>• Patented solution</li> <li>• Seals around pipe penetrations through roofing or wind barriers</li> <li>• Comes with pre-stamped markings</li> <li>• French VOC A+</li> <li>• DAFA UV pipe collar is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1558389	620018444	5705636370514	Type 345 345 x 345 mm	Round pipes - Ø80 to Ø200 mm Square pipes 100 x 150 mm and 150 x 150 mm	50 pcs	
	1897881	620020949	5705636387574	Type 520 520 x 520 mm	Round pipes - Ø200 to Ø400 mm	25 pcs	


## DAFA UV cable collar Type 195

DAFA UV cable collar is a patented airtight solution for electrical boxes or cable conduits through roof underlays or wind barriers.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
	1558383	620018445	5705636370507	<b>DAFA UV cable collar</b> Type 195 195 x 195 mm	PL ceiling box Ø80 mm and cables Ø7 to Ø22 mm	50 pcs	<ul style="list-style-type: none"> <li>• Patented solution</li> <li>• Seals around electrical junction boxes and cable penetrations through roofing or wind barriers</li> <li>• Comes with pre-stamped markings</li> <li>• French VOC A+</li> <li>• DAFA UV cable collar is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA UV cable collar Type 115

DAFA UV cable collar is a patented airtight solution for electrical boxes or cable conduits through roof underlays or wind barriers.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
	2344467	620045079	5705636502687	<b>Cable collar</b> Type 115 Ø115 mm	Cables from Ø7 mm to Ø35 mm	50 pcs	<ul style="list-style-type: none"> <li>• Patented solution</li> <li>• Saves energy due to airtight penetrations/joins</li> <li>• A single flexible gasket for all standard cable dimensions</li> <li>• Simple, fast, and secure installation</li> <li>• No special tools are required</li> <li>• Installed without requiring subsequent sealing, gluing, caulking, etc.</li> </ul>



## DAFA Renovation Collar

DAFA Renovation Collars are used for air-tight sealing of the climate envelope in the event of penetrations of existing pipes and cables during renovation tasks.

Illustration	DB no.	DAFA no.	EAN no.	Type	Dimensions	Contents per box	Advantages
	2404592	620046279	5705636532899	Ø115 mm	For cables / pipes from Ø5 to Ø20 mm Ø30 to Ø50 mm Ø80 to Ø125 mm Ø140 to Ø180 mm	25 pcs.	<ul style="list-style-type: none"> <li>• Specifically designed for sealing tasks in renovation projects.</li> <li>• Self-vulcanizing</li> <li>• Extremely stretchable</li> <li>• Only one flexible packing for common pipe dimensions / exhaust channels</li> <li>• Mounted without the use of sealant, glue, grouting, etc.</li> </ul>
2404593	620046277	5705636532875	Ø160 mm	25 pcs.			
2404594	620046278	5705636532882	Ø250 mm	25 pcs.			
2404595	620047766	5705636535944	Ø300 mm	25 pcs.			


## DAFA roof decking vent

DAFA roof decking vents are used to ensure ventilation through the roofing membrane and can be used for all vapor permeable and impermeable roofing membranes and solid roof underlays.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per bag	Contents per box	Advantages
 <p>Inside - out vent</p>	1978192	620032802	5705636455297	<b>DAFA roof decking vent</b> From the inside and Out	10 pcs	60 pcs	<ul style="list-style-type: none"> <li>Effectively ventilates the roof cavity, protecting against moisture and rot</li> <li>Can be installed quickly and efficiently, from the inside or outside, thanks to a 'snap-lock' system.</li> <li>Variable dimensions, 0,2-25 mm</li> <li>Installation only requires one person</li> <li>DAFA roof decking vents are listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 <p>Outside - in vent</p>	1978193	620032803	5705636455303	From the outside and In	10 pcs	60 pcs	



## DAFA roof decking tensioners - 'Blue Elephants'

DAFA roof decking tensioners are used to tension all flexible roofing, to prevent it from flapping in windy weather.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Height	Contents per box	Advantages
	2333926	620044387	5705636500225	<b>DAFA roof decking tensioner</b>	91 mm	136 pcs	<ul style="list-style-type: none"> <li>Flexible, UV resistant, non-water absorbent blue PE foam</li> <li>Made in Denmark</li> <li>Quick and easy installation</li> <li>Installed under the roof batten</li> <li>Delivered in a convenient bag</li> <li>DAFA roof decking tensioners is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

## DAFA roof decking tensioners

DAFA roof decking tensioners are used to tension all flexible roofing, to prevent it from flapping in windy weather.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per box	Advantages
 <p>50 mm 72 mm</p>	5000059	250000025	5705636214276	<b>Type 72</b> 72 mm x 50 mm. For 25 mm counter-batten	50 mm	100 pcs	<ul style="list-style-type: none"> <li>Black cellular rubber with closed cells</li> <li>Flexible, ozone-resistant, non-water-absorbing foam</li> <li>Comes with matching cable tensioners</li> <li>Installed under the roof batten</li> <li>DAFA roof decking tensioners (Type 72 and Type 95) is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 <p>50 mm 95 mm</p>	5000060	250000032	5705636214283	<b>Type 95</b> 95 mm x 50 mm. For 32 mm counter-batten	50 mm	100 pcs	

# DAFA Radon System™



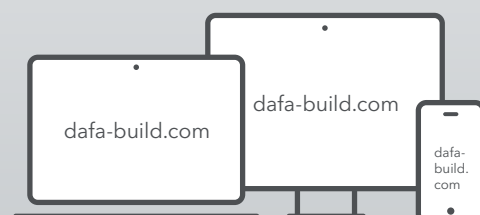
## DAFA Radon System™

DAFA's radon sealing system is an effective sealing system designed to prevent radon gas from entering buildings.

The components of DAFA Radon System, which combine polymer technology and radon sealing techniques, allow building designers to choose the optimal solution for sealing on the ground floor, floors, and foundations. The system prevents radon gasses from entering buildings and can be used in most types of heated residential and office buildings etc.

### [dafa-build.com/en/radon](https://dafa-build.com/en/radon)

Get information wherever you are. Access to information from DAFA has become even easier. Our website has been optimized. This includes making it mobile-phone-friendly, so you can easily search via your mobile phone.



# Complete radon system from DAFA

System solutions from underground to the rooftop.

Radon is on everyone's lips. DAFA is therefore introducing a complete radon protection system, and DAFA's solutions now offer sealing from underground to the rooftop.

DAFA Radon System is the latest addition to the family of system solutions for sealing and ventilation applications in construction. Like DAFA AirStop System and DAFA AirVent System, the system solution consists of a series of foils dedicated to the application, supplemented with several accessory products.

## Complete radon system

The new system is a safe and effective system for sealing out radon. The components of the DAFA Radon System, which combine polymer technology and radon sealing techniques, allow architects, contractors, and merchants to choose the optimal solution for sealing on the ground floor, floors, and foundations. The system prevents radon gasses from entering buildings and can be used in most heated residential and office buildings. The system consists of a membrane and accessory products such as pipe and cable collars, sealant, UV tape, and a radon sump.

## Approved under the applicable requirements

The products in the system are durable and proven and fulfill the applicable requirements throughout the Nordic region. The Norwegian SINTEF Certification institute has tested and approved the products in the system. This guarantees the Danish construction sector that DAFA Radon System meets the radon protection requirements.

## Easy-to-install products

Like DAFA's other systems, the products are designed to ensure quick, easy, and safe installation. As with DAFA's other system solutions, the radon system includes a well-documented and easy-to-read installation guide. Therefore, professional building industry partners can be confident about undertaking projects using the new radon products. The installation instructions are unambiguous and contain explanatory descriptions and illustrations.




## DAFA Radon System™

Read more at [www.dafa-build.com/en/radon](http://www.dafa-build.com/en/radon)




## DAFA radon barrier

DAFA radon barrier is part of the DAFA Radon System™. It ensures an effective airtight radon and moisture-resistant seal.

Illustration	DB no.	DAFA no.	EAN no.	Product text/dimensions	Number of rolls per pallet/m <sup>2</sup> per pallet	Advantages
	1948727 1948728	620029133 620030414	5705636451558 5705636451565	<b>DAFA radon barrier</b> 1.5 m x 25 m x 0.4 mm 4 m x 25 m x 0.4 mm	33 rolls/1237 m <sup>2</sup> 27 rolls/2700 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Ensures an effective airtight radon and moisture-resistant seal</li> <li>French VOC A+</li> <li>SINTEF approved</li> <li>DAFA radon barrier is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA wall membrane

DAFA wall membrane is part of the DAFA Radon System™. DAFA wall membrane can be used as a barrier against moisture and radon and as a foundation membrane.

Illustration	DB no.	DAFA no.	EAN no.	Product text/dimensions	Number of rolls per pallet/m <sup>2</sup> per pallet	Advantages
	1982149 1982150 1982151 1982152 1982153 1982154 1982155 1982156 1982157 1982159	620032838 620032839 620032840 620032841 620032842 620032843 620032844 620032845 620032846 620032847	5705636455464 5705636455471 5705636455488 5705636455495 5705636455501 5705636455518 5705636455525 5705636455532 5705636455549 5705636455556	<b>DAFA wall membrane</b> 110 mm x 25 m x 0.3 mm 150 mm x 25 m x 0.3 mm 200 mm x 25 m x 0.3 mm 230 mm x 25 m x 0.3 mm 300 mm x 25 m x 0.3 mm 350 mm x 25 m x 0.3 mm 400 mm x 25 m x 0.3 mm 500 mm x 25 m x 0.3 mm 600 mm x 25 m x 0.3 mm 1000 mm x 25 m x 0.3 mm	980 rolls/2695 m <sup>2</sup> 832 rolls/3120 m <sup>2</sup> 624 rolls/3120 m <sup>2</sup> 520 rolls/2990 m <sup>2</sup> 416 rolls/3120 m <sup>2</sup> 312 rolls/2730 m <sup>2</sup> 312 rolls/3120 m <sup>2</sup> 208 rolls/2600 m <sup>2</sup> 208 rolls/3120 m <sup>2</sup> 104 rolls/2600 m <sup>2</sup>	<ul style="list-style-type: none"> <li>Prevents moisture from rising into the wall or woodwork.</li> <li>Can be used as a radon barrier when correctly installed.</li> <li>Can be used as a foundation foil</li> <li>DAFA wall membrane is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

## DAFA UV tape

DAFA UV tape is part of the DAFA Radon System™ and is perfect for taping radon barriers.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	1438817 1897456	620016905 620025138	5705636360164 5705636413778	<b>DAFA UV tape WITH logo</b> 60 mm 100 mm	10 x 25 m rolls 6 x 25 m rolls	<ul style="list-style-type: none"> <li>Used for sealing radon barriers</li> <li>Flexible/stretchable</li> <li>Highly adhesive</li> <li>French VOC A+</li> <li>DAFA UV tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	2392247	620047265	5705636270890	with split-liner 60 mm	10 x 25 m rolls	
	1836320 1984065	620026334 620026300	5705636425115 5705636420523	<b>WITHOUT logo</b> 60 mm 100 mm*	10 x 25 m rolls 6 x 25 m rolls	


\* Special order. Delivery time: at least 4 weeks. Min. order 270 rolls






## DAFA Multi Sealing™

DAFA Multi Sealing is an extruded special butyl sealing tape coated with stretch foil.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box/roll	Advantages
	1382576	620015438	5705636351131	1.5 x 50 mm	8 x 5 m rolls	<ul style="list-style-type: none"> <li>Adheres strongly to most building materials</li> <li>Does not dry out, maintains elasticity</li> <li>Very durable</li> <li>Does not contain harmful substances</li> <li>DAFA Multi Sealing is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>



## DAFA butyl tape

DAFA butyl tape is part of the DAFA Radon System™ and is an elastic butyl sealing tape for affixing radon barriers.

Illustration	DB no.	DAFA no.	EAN no.	Product text/dimensions	Contents per box	Advantages
	1985023	620032588	5705636454429	<b>DAFA butyl tape</b> 20 mm x 25 m	10 rolls	<ul style="list-style-type: none"> <li>Strong adhesion to most building materials</li> <li>Does not contain solvents</li> <li>Does not dry out, maintains elasticity</li> <li>Does not leave marks on fingers or installation surfaces</li> <li>Very durable</li> <li>DAFA butyl tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## Butyl 200 sealant

Used for sealing or at joints in the radon barrier.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per packet	Contents per box	Advantages
	7971765	233400100	5705636098944	<b>Tube</b>	310 ml	25 pcs	<ul style="list-style-type: none"> <li>Good UV resistance</li> <li>Good resistance to acids and alkaline substances</li> <li>DAFA butyl 200 is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1371824	620010694	5705636313764	<b>Bag</b>	600 ml	11 bags	



## DAFA universal outdoor adhesive

A permanent elastic sealant for affixing and gluing foils and membranes.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Quantity	Contents per box	Advantages
	1828048	620026751	5705636423418	<b>DAFA universal outdoor adhesive Bag</b>	600 ml	12 pcs	<ul style="list-style-type: none"> <li>A permanently elastic special adhesive rubber compound</li> <li>Affixes foils to both porous and smooth surfaces</li> <li>DAFA universal outdoor adhesive is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

## DAFA radon universal cable collar

DAFA radon cable collar is a patented airtight solution for electrical boxes or cable conduits through roof underlays or wind barriers.



Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
 	1558383	620018445	5705636370507	<b>DAFA UV cable collar</b> Type 195 195 x 195 mm	For PL ceiling box Ø80 mm or cables 4 pcs - Ø7 to Ø10 mm 2 pcs - Ø7 to Ø22 mm	50 pcs	<ul style="list-style-type: none"> <li>Patented solution</li> <li>Seals around electrical junction boxes and cable penetrations through roofing or wind barriers</li> <li>Comes with pre-stamped markings</li> <li>DAFA UV cable collar is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>



## DAFA radon universal pipe collar

DAFA radon pipe collar is a patented airtight solution for electrical boxes or cable conduits through roof underlays and barriers.




Illustration	DB no.	DAFA no.	EAN no.	Product text	Dimensions - pipes/cables	Contents per box	Advantages
	1558385	620019349	5705636387352	<b>DAFA radon pipe collar</b> Type 260 260 x 260 mm	Round pipes - Ø15 to Ø110 mm	50 pcs	<ul style="list-style-type: none"> <li>Patented solution</li> <li>Seals around pipe penetrations through radon barriers</li> <li>Comes with pre-stamped markings</li> <li>DAFA radon pipe collar is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1558389	620018444	5705636370514	Type 345 345 x 345 mm	Round pipes - Ø80 to Ø200 mm Square pipes 100 x 150 mm and 150 x 150 mm	50 pcs	
	1897881	620020949	5705636387574	Type 520 520 x 520 mm	Round pipes - Ø200 to Ø400 mm	25 pcs	



## DAFA radon corner


DAFA radon corners are used to easily and securely seal the radon barrier at the corners of foundations with an angle of 90 degrees.

Illustration	DB no.	DAFA no.	EAN no.	Product text/width	Contents per bag	Advantages
	1981544	620032416	5705636453897	<b>DAFA radon corner</b> 150 x 150 mm	10 pcs	<ul style="list-style-type: none"> <li>Made of DAFA radon barrier</li> <li>Safe and easy to install</li> <li>DAFA radon corner is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>




## DAFA Renovation Collar

DAFA Renovation Collars are used for air-tight sealing of the climate envelope in the event of penetrations of existing pipes and cables during renovation tasks.

Illustration	DB no.	DAFA no.	EAN no.	Type	Dimensions	Contents per box	Advantages
	2404592 2404593 2404594 2404595	620046279 620046277 620046278 620047766	5705636532899 5705636532875 5705636532882 5705636535944	Ø115 mm Ø160 mm Ø250 mm Ø300 mm	For cables / pipes from Ø5 to Ø20 mm Ø30 to Ø50 mm Ø80 to Ø125 mm Ø140 to Ø180 mm	25 pcs. 25 pcs. 25 pcs. 25 pcs.	<ul style="list-style-type: none"> <li>Specifically designed for sealing tasks in renovation projects.</li> <li>Self-vulcanizing</li> <li>Extremely stretchable</li> <li>Energy-saving due to tight penetrations/joints</li> <li>Only one flexible packing for common pipe dimensions / exhaust channels</li> <li>Mounted without the use of sealant, glue, grouting, etc.</li> </ul>

## DAFA radon sealing compound

DAFA radon sealing compound is fluid and self-leveling, and effectively seals out radon, air, and moisture around installation penetrations, building columns, and irregular profiles of any shape and diameter.

Illustration	DB no.	DAFA no.	EAN no.	Product text/content	Contents per box	Advantages
	1939158 2070306	620030930 620036359	5705636447797 5705636470771	<b>DAFA radon sealing compound</b> 300 ml. 5 liters	25 pcs 1 pc	<ul style="list-style-type: none"> <li>Seals around pipe penetrations through radon barriers</li> <li>Good chemical resistance to water, salt water, grease, oils, weak acids and bases</li> <li>DAFA radon sealing compound is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA flexible mold

A flexible foam mold designed to hold 300 ml of DAFA Radon sealing compound during the curing process.

Illustration	DB no.	DAFA no.	EAN no.	Product text/dimensions	Contents per bag	Advantages
	1981546	620029527	5705636441177	<b>DAFA flexible mold</b> 950 x 20 x 25 mm	10 pcs	<ul style="list-style-type: none"> <li>Flexible mold that can be formed into a wide variety of shapes.</li> <li>Self-adhesive backing</li> <li>DAFA flexible mold is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA radon sump

DAFA radon sump is part of the DAFA Radon System™. The sump serves as a collection point for radon gas before it is vented away.


Illustration	DB no.	DAFA no.	EAN no.	Product text/dimensions	Contents per box/roll	Advantages
	1981548	620029529	5705636441207	<b>DAFA radon sump</b> 280 mm x 280 mm x 200 mm	1 sump + 3 plugs	<ul style="list-style-type: none"> <li>Easy installation</li> <li>Light (about 325g)</li> <li>Made in-house</li> <li>Flexible</li> </ul>

## DAFA counter-batten

DAFA counter-batten is specially designed for use in the installation of DAFA Radon barriers.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Advantages
	1863371	620027282	5705636429069	3 mm x 30 mm x 1220 mm	150 pcs	<ul style="list-style-type: none"> <li>Easy to trim</li> <li>Can be affixed with staples</li> </ul>
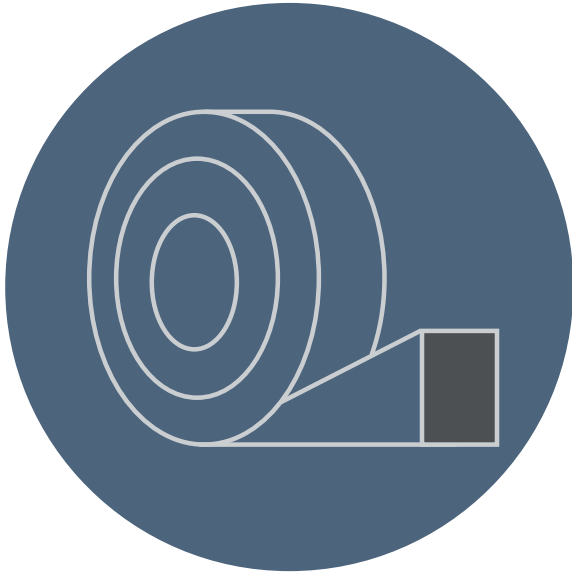
# Joint sealing solutions



## CONTENTS

illmod 600 joint sealing tape	34
DAFA universal primer	34
DAFA water-based primer	34
Dimensions table for joint sealing tape	35
DAFA Flex 600 joint sealing tape	37
illmod Trio+ joint sealing tape	37
Backstop nylon foam strips, square	38
Backstop nylon foam strips, round	38

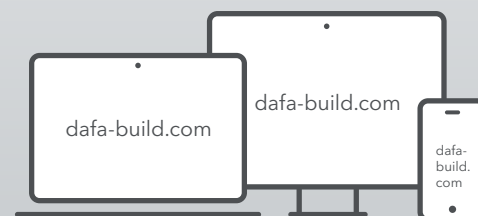
## Joint sealing solutions

DAFA's joint products are thoroughly tested and withstand Danish weather conditions.

The joint sealing products are used to seal around windows and doors, or for joints between prefabricated elements in construction. DAFA joint products are a dry sealing solution and are quick to install.




## [dafa-build.com/en/jointseal](https://dafa-build.com/en/jointseal)

Get information wherever you are. Access to information from DAFA has become even easier. Our website has been optimized. This includes making it mobile-phone-friendly, so you can easily search via your mobile phone.



## illmod 600 joint sealing tape

illmod 600 is used to externally seal around windows and doors. The joint sealing tape is rainproof and vapor-permeable, preventing the formation of rot and dry rot in the structure.


Illustration	DB no.	DAFA no.	EAN no.	Dimensions/ Color	Contents per box	Contents per box/m	Advantages
 <p>Example of illmod 600, 20/8-15</p>  <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p> 20/ stands for the gap depth in mm</p> <p> /8-15 stands for the gap width in mm</p> </div>	1829143 1829142	620026823 620026822	5705636423784 5705636423777	10/2 *black *gray	20 x 12.5 m rolls	250 m	<ul style="list-style-type: none"> <li>• BG1 approved in line with DIN 18542</li> <li>• The market's best sound dampening test result</li> <li>• Controlled expansion</li> <li>• Product support - from architect to delivery</li> <li>• Reduces the formation of heat or cold bridges</li> <li>• Securely fills even the smallest unevenness</li> <li>• Resistant to mold and microorganisms</li> <li>• No joint slip</li> <li>• BG1 tested up to 1359 Pa for installed 1-step joints</li> <li>• Dimension rules - see page 36</li> <li>• Courses in installation/ knowledge of joint sealing tape</li> <li>• GEV-EMICODE® <b>EC1 PLUS</b></li> <li>• illmod 600 is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul> <p><i>* Special order. Delivered to order.</i></p>
	5035094	202901020	5705636221717	10/3-7 black	20 x 15 m rolls	300 m	
	5035095 5035105	202901520 202801520	5705636221731 5705636221748	15/3-7 black gray	13 x 15 m rolls	195 m	
	5035096 5035106	202901530 202801530	5705636221755 5705636221762	15/5-10 black gray	13 x 10 m rolls	130 m	
	5035097 5035107	202901540 202801540	5705636221779 5705636221786	15/7-12 black gray	13 x 8 m rolls	104 m	
	1373852 1373861	202901550 202801550	5705636230566 5705636232065	15/8-15 black gray	13 x 6 m rolls	78 m	
	5035101 5035110	202902040 202802040	5705636221830 5705636221847	20/7-12 black gray	10 x 8 m rolls	80 m	
	5035102 5035111	202902050 202802050	5705636221854 5705636221861	20/8-15 black gray	10 x 6 m rolls	60 m	
	5779757 5779758	202402060 202302060	5705636002828 5705636002545	20/10-18 black gray	15 x 6.5 m rolls	97.5 m	
	5761211 5761210	202402580 202302580	5705636016665 5705636037455	25/13-24 black gray	12 x 5.2 m rolls	62.4 m	
2748770 3164464	202430100 202330100	5705636002958 5705636002675	30/17-32 black gray	10 x 4 m rolls	40 m		
3647617 3647633	202440150 202340150	5705636002972 5705636002699	40/28-40 black gray	7 x 2.7 m rolls	18.9 m		



illmod 600 and DAFA Flex 600 are the only draft excluder tapes on the market subjected to regular unannounced external quality control checks for ingress protection from driving rain, carried out by the MPA BAU institute in Hannover (Materialprüfanstalt für das Bauwesen Hannover).



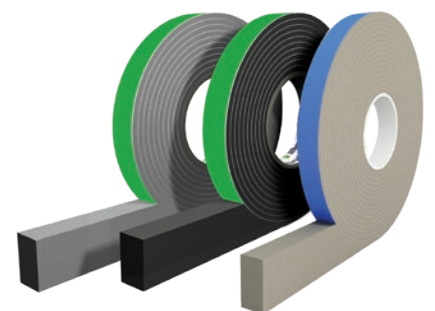All DAFA joint sealing tapes are EC1PLUS classified by EMICODE. EMICODE is a certification for low-emission building materials that are solvent-free. EMICODE EC 1 PLUS (very low emissions) is the most stringent EMICODE class.




## Dimensions table for joint sealing tape



Type	Depth mm*	Width mm	DAFA Flex 600™	illmod 600	illmod Trio+**
10/2	10	2		✓	
10/3-7	10	3-7		✓	
15/3-7	15	3-7		✓	
15/5-10	15	5-10		✓	
15/7-12	15	7-12	✓	✓	
15/8-15	15	8-15	✓	✓	
20/7-12	20	7-12	✓	✓	
20/8-15	20	8-15	✓	✓	
20/10-18	20	10-18	✓	✓	
25/13-24	25	13-24	✓	✓	
30/17-32	30	17-32		✓	
40/28-40	40	28-40		✓	
66/8-15	66	8-15			✓
77/8-15	77	8-15			✓
66/10-20	66	10-20			✓
77/10-20	77	10-20			✓

Standard stock items are marked. Other dimensions to order.

\* The joint sealing tape is mounted 2-4 mm back from the front edge.


\*\* illmod Trio+ is delivered to order.



	7 stands for the gap depth in mm
	2 stands for the gap width in mm


## DAFA universal primer

Use DAFA universal primer where sufficient adhesion to the surface cannot be achieved using DAFA adhesive or joint sealing tape etc. It is recommended that primer be used on absorbent surfaces such as bricks, concrete, aerated concrete, natural stone, etc.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	1984522	620033110	5705636456522	DAFA universal primer 500 ml	12 pcs	<ul style="list-style-type: none"> <li>• Swivel spray function, easy to apply</li> <li>• Enhances adhesion</li> <li>• Quick-drying</li> <li>• Transparent</li> <li>• DAFA universal primer is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

## DAFA water-based primer

Use DAFA water-based primer where sufficient adhesion to the surface cannot be achieved using DAFA adhesive or vapor barrier tape etc. It is recommended that primer be used on absorbent surfaces such as bricks, concrete, aerated concrete, natural stone, etc.


Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	2093684	620037504	5705636476483	DAFA water-based primer 1000 ml	6 bottles	<ul style="list-style-type: none"> <li>• Water based and solvent free</li> <li>• Enhances adhesion</li> <li>• Changes color when cured</li> <li>• Can be removed with water before curing</li> <li>• Good water resistance after curing</li> <li>• GEV-EMICODE® EC1 PLUS</li> <li>• DAFA water-based primer is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>

# Unbeatable advantages with DAFA's illmod 600




## Better insulation properties

The latest test results from the Danish Technological Institute show that joint sealing tapes from DAFA ensure airtight and highly effective insulation. The latest tests show that DAFA's joint sealing tapes provide up to **60% better insulation** than traditional sealants. This ensures airtight and energy-friendly buildings with good indoor climates.




## Efficient sound dampening

DAFA's joint sealing tape consists of closed, air-filled insulating cells. This means they have effective sound dampening of up to 58 dB. No sound bridges therefore arise through joints when the joint sealing tape fills them out.




## Prevents thermal bridges

DAFA's illmod 600 can withstand temperatures from -30 to +100°C. The joint sealing tape ensures minimal heat loss through joints, preventing dark spots inside. DAFA's illmod 600 improves the indoor climate by preventing draughts through joints.




## Approved and tested quality

DAFA's illmod 600 joint sealing tape has been tested by the German RAL Institute and TÜV and meets DIN 18542 requirements and DIN 4102 fire requirements. The quality has been proven through more than 40 years on the market and the AB92 quality approval. This means the best possible guarantee of a long-lasting sealant that fully meets the building requirements.




## Secure joint sealing

illmod 600 joint sealing tape ensures no leaks occur, because the joint sealing tape adheres to the frame and fills the joint out all the way to the maximum width of 40 mm. This ensures an airtight solution - illmod 600 joint sealing tape remains in position.




## Resistant to fungus

DAFA's illmod 600 joint sealing tape is made of inorganic material and is not broken down by molds, fungi or microorganisms. illmod 600 joint sealing tape therefore lasts a long time and can withstand installation in humid environments, without risk of the seal breaking down.



## Prevents ingress of driving rain

DAFA's joint sealing tape has been BGI tested up to 1359 Pa. The standard test for installed 1-step joint filler under DIN 18542 is 600 Pa. A Danish hurricane corresponds to 700 Pa. DAFA's joint sealing tape keeps driving rain out at all times.



## Green buildings

illmod 600, DAFA Flex 600 and illmod Trio+ are registered in the database of construction products that may be used in construction bearing the Nordic Ecolabel


## DAFA Flex 600™ joint sealing tape

DAFA Flex 600 is used to externally seal around windows and doors. The joint sealing tape is rainproof and vapor-permeable, preventing the formation of rot and dry rot in the structure. DAFA Flex 600 joint sealing tape is pre-compressed and self-adhesive.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions/ Color	Contents per box/roll	Contents per box/m	Advantages
 <p>Example of DAFA Flex 600 20/7-12</p> <p>20/ stands for the gap depth in mm /7-12 stands for the gap width in mm</p>	1337282 1337257	620014185 620014179	5705636342313 5705636342252	15/7-12 black gray	13 x 8 m rolls	104 m	<ul style="list-style-type: none"> <li>• BG1 approved and CE marked</li> <li>• Weather resistant</li> <li>• Expands slowly</li> <li>• Reduces the formation of heat or cold bridges</li> <li>• Securely fills even the smallest unevenness</li> <li>• Resistant to mold and microorganisms</li> <li>• Self-adhesive on one side</li> <li>• Simple, fast and safe installation</li> <li>• No joint slip</li> <li>• Rainproof to 600 Pa</li> <li>• Storage shelf life max. 2 years</li> <li>• Dimension rules - see page 36</li> <li>• GEV-EMICODE® <b>EC1 PLUS</b></li> <li>• DAFA Flex 600 is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1337286 1337263	620014187 620014181	5705636342337 5705636342276	15/8-15 black gray	13 x 6 m rolls	78 m	
	1337283 1337261	620014186 620014180	5705636342320 5705636342269	20/7-12 black gray	10 x 8 m rolls	80 m	
	1337288 1337264	620014188 620014182	5705636342344 5705636342283	20/8-15 black gray	10 x 6 m rolls	60 m	
	1337289 1337280	620014189 620014183	5705636342351 5705636342290	20/10-18 black gray	15 x 6.5 m rolls	97.5 m	
	1337292 1337281	620014190 620014184	5705636342368 5705636342306	25/13-24 black gray	12 x 5.2 m rolls	62.4 m	

## illmod Trio+ joint sealing tape

For sealing both inside and out, and even insulating the center section of the window in one workflow.



Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Contents per box/m	Advantages
	1449358	620017432	5705636363929	illmod Trio+*	4 x 6 m rolls	24 m	<ul style="list-style-type: none"> <li>• Eco-friendly</li> <li>• Rainproof to 600 Pa</li> <li>• Sound dampening (45 dB for 10 mm gap)</li> <li>• BG1 approved</li> <li>• Good insulation properties</li> <li>• Vapor permeable (outside)</li> <li>• Quick all-in-one installation</li> <li>• Ideal for passive buildings and modular construction</li> <li>• GEV-EMICODE® <b>EC1 PLUS</b></li> <li>• illmod Trio+ is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1449359	620017433	5705636363936	66/8-15	3 x 6 m rolls	18 m	
	1449362	620017434	5705636363943	66/10-20	4 x 5 m rolls	20 m	
	1449364	620017435	5705636363950	77/10-20	3 x 5 m rolls	15 m	

\* illmod Trio+ is not a stock item and is only delivered to order.





## Backstop nylon foam strips, square


Used as a backstop for sealants.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per packet	Total contents	Advantages
 <p>20 × 30 mm shown</p> 	1450106	620017473	5705636364278	20 × 30 mm	75 x 1.2 m	90 m	<ul style="list-style-type: none"> <li>• Color: Charcoal</li> <li>• Density: 22 kg/m<sup>3</sup></li> <li>• Not UV-resistant</li> <li>• Can absorb moisture</li> <li>• Easy to compress</li> <li>• Backstop nylon foam strips is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1450109	620017474	5705636364285	20 × 40 mm	75 x 1.2 m	90 m	

## Backstop nylon foam strips, round

Used as a backstop for sealants.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per packet	Total contents	Advantages
 <p>Ø25 mm shown</p> 	5697088	211200025	5705636185101	Ø25 mm	75 x 1.2 m	90 m	<ul style="list-style-type: none"> <li>• Color: Charcoal</li> <li>• Density: 22 kg/m<sup>3</sup></li> <li>• Not UV-resistant</li> <li>• Can absorb moisture</li> <li>• Backstop nylon foam strips is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	5697089	211200030	5705636185118	Ø30 mm	75 x 1.2 m	90 m	

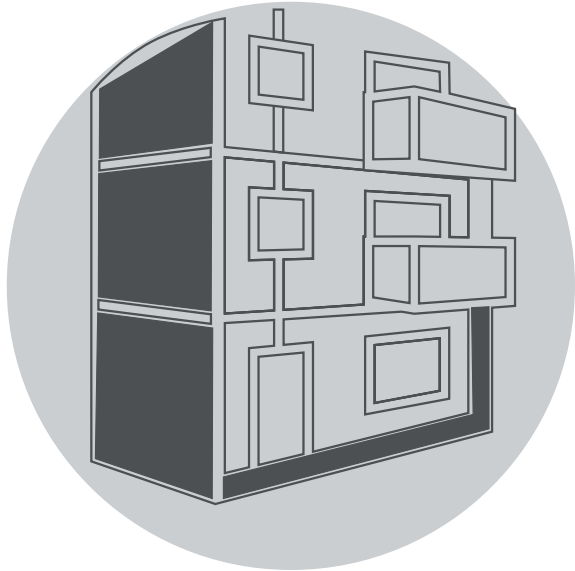

## DAFA Facade Kit™

### DAFA Facade Kit™

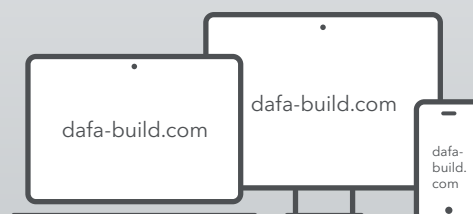
- strong range that seals, absorbs and protects

DAFA Facade Kit consists of a number of foam, plastic and rubber products that help in the installation of secure exterior wall solutions. The products have various properties that make them ideal for ensuring more secure and durable exterior wall structures. The products work in conjunction with other building materials such as steel, concrete, wood and glass.

The products are delivered in customized grades, tailored to each application, to either absorb vibrations, seal against wind and weather or protect enclosed building materials.

### [dafa-build.com/en/facadekit](https://dafa-build.com/en/facadekit)

Get information wherever you are. Access to information from DAFA has become even easier. Our website has been optimized. This includes making it mobile-phone-friendly, so you can easily search via your mobile phone.



# DAFA Facade Kit™

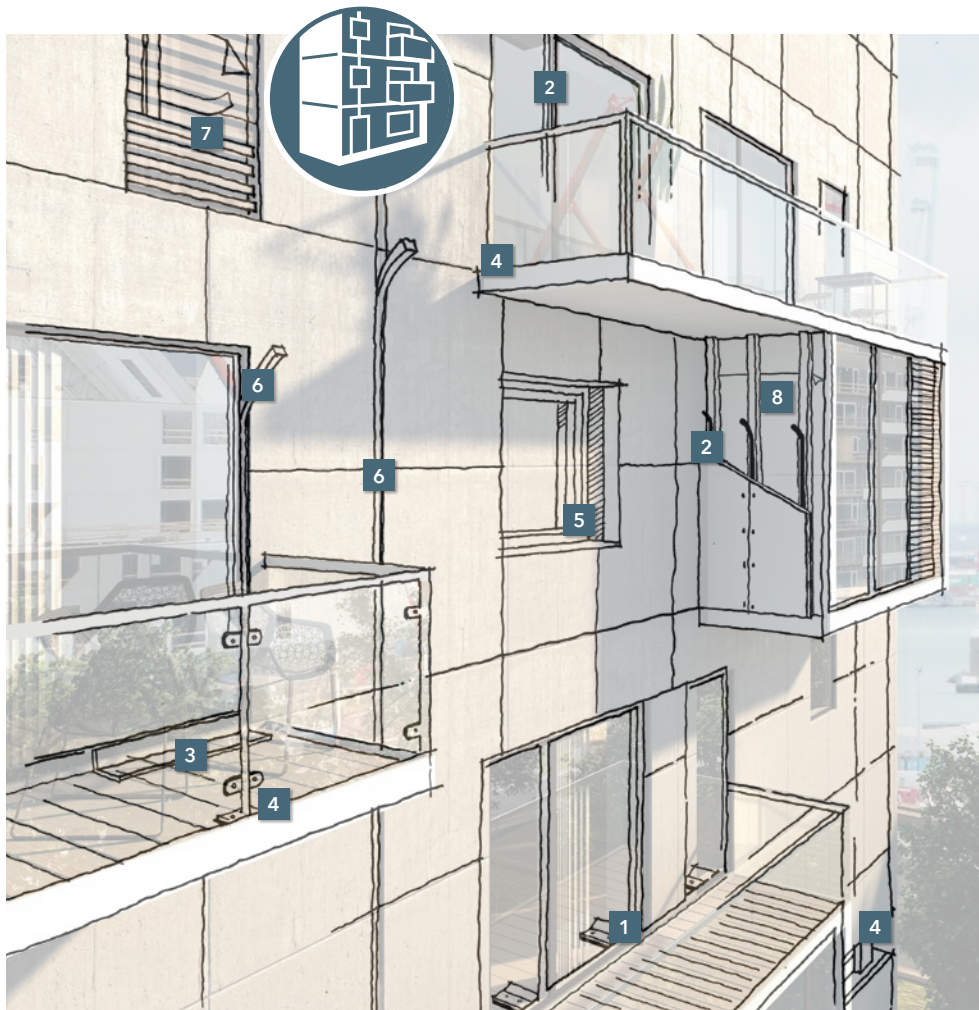
## Strong range for sealing exterior walls

### Products that absorb, seal and protect structures in large exterior walls


DAFA Facade Kit consists of a number of foam, plastic and rubber products that help in the installation of secure exterior wall solutions. The products have various

properties that make them ideal for ensuring more secure and durable exterior wall structures. The products work in conjunction with other building materials such as steel, concrete, wood and glass.


The products are delivered in customized grades, tailored to each application, to either absorb vibrations, seal against wind and weather or protect enclosed building materials.




**1 DAFA Neoprene variants**  
- typically used as a support layer in heavy structures such as concrete stairs.



**2 DAFA butyl variants**  
- adhesive products for sealing between two materials.



**3 DAFA Therm**  
- insulating and sealing layers. Used for applications such as filling under windows/doors and on joists.




**4 DAFA EPDM variants**  
- high elasticity and weather resistance. Typically used for sheet joints, external coverings and rubber sheeting.




**8 DAFA wind barrier**  
- external sealing of lightweight structures.



**7 DAFA UV tape**  
- sealing foil joints, in vapor barrier, roof underlay and wind barrier.



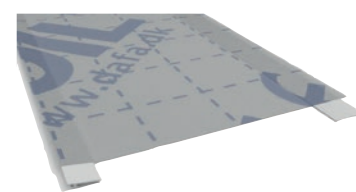**6 DAFA joint sealing tape**  
- vapor-permeable expanding joint sealing tape. Used for windows and element joints.



**5 DAFA lining foil with groove**  
- interior sealing of door and window apertures.

# In-house test center improves development of DAFA's products.



DAFA's new climate testing chambers at Holmstrupgårdvej in Brabrand.

## Should vapor barrier foils and accessory products be tested more extensively? Should manufacturers and suppliers take the lead in regularly testing vapor barrier products?

In order to underscore and carry on the progressive development that has characterized DAFA's vapor barrier system, we are now able to conduct tests in our own climate test chamber. The new test center makes it possible to perform aging tests - subjecting products to harsh climate impacts from heat, cold, UV light and moisture. This allows us to simulate the most commonly used and recognized national and international testing standards.

The climate test chamber will be used in several contexts: Before new products are sent for independent and quite expensive tests at third parties, such as the Danish Technological Institute. In connection with ongoing control of our own products on the market. This allows us to ensure that the quality of vapor barrier foils and accessory products meets the standards they are verified under.

Our investment in the new climate testing chamber and our ongoing testing should be seen as a natural part of the extensive warranty schemes of up to 30 years.

*"We want to be a leading provider of sealing solutions for construction. We are particularly renowned for our entire vapor barrier system - DAFA AirStop System. We will continue the development we have undergone in recent years as the requirements for airtight buildings also increase."*  
- Jens Eg,  
Director for Building Materials.







DAFA A/S can simulate the most commonly used and recognized national and international testing standards.



The products are exposed to strong climate impacts from heat, cold, UV light and moisture.



## EPDM rubber sheeting

EPDM rubber sheeting is used on foundations, and as flashing around windows and on exterior wall structures.

Illustration	DB no.	DAFA no.	EAN no.	Product text/width	Contents per roll	Advantages
 	1325448 1325450	620013771 620013845	5705636339542 5705636340104	<b>Blue Roll</b> Thickness 1.2mm 100 mm 205 mm	30 m 30 m	<ul style="list-style-type: none"> <li>• Many applications, where an extremely supple and flexible flashing/cover is necessary or required</li> <li>• We recommend DAFA EPDM adhesive for installation</li> <li>• More widths available</li> <li>• EPDM rubber sheeting is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 	1325443 1325447	620002672 620013770	5705636264264 5705636339535	<b>Green Roll</b> Thickness 0.8 mm 100 mm 205 mm	30 m 30 m	



## DAFA Multi Sealing™

DAFA Multi Sealing is an extruded special butyl sealing tape coated with stretch foil.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box/roll	Advantages
 	1382576	620015438	5705636351131	1.5 x 50 mm	8 5 m rolls	<ul style="list-style-type: none"> <li>• Adheres strongly to most building materials</li> <li>• Solvent-free</li> <li>• Does not dry out, maintains elasticity</li> <li>• Does not leave marks</li> <li>• Very durable</li> <li>• Does not contain harmful substances</li> <li>• DAFA Multi Sealing is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA universal outdoor adhesive

A permanent elastic sealant for affixing and gluing foils and membranes.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Quantity	Contents per box	Advantages
 	1828048	620026751	5705636423418	DAFA universal outdoor adhesive Bag	600 ml	12 pcs	<ul style="list-style-type: none"> <li>• Made from a permanently elastic special adhesive rubber compound</li> <li>• Can be applied directly to roof underlays or wind barriers</li> <li>• Affixes foils to both porous and smooth surfaces</li> <li>• DAFA universal outdoor adhesive is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>



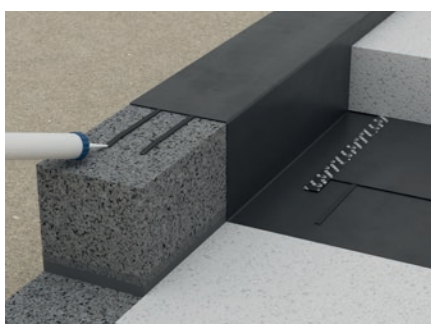DAFA uni. outdoor adhesive can be applied directly to roof underlays or wind barriers. Affixes membranes to both porous and smooth surfaces.






DAFA uni. outdoor adhesive for affixing wall membrane.



DAFA uni. outdoor adhesive for affixing EPDM membranes.


## Butyl 200 sealant

Used for sealing joints or joints in roof structures.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per packet	Contents per box	Advantages
	7971765	233400100	5705636098944	<b>Tube</b>	310 ml	25 pcs	<ul style="list-style-type: none"> <li>• Good UV resistance</li> <li>• Good resistance to acids and alkaline substances</li> <li>• The surface must be clean, dry and free of oil and grease</li> <li>• DAFA butyl 200 is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
 	1371824	620010694	5705636313764	<b>Bag</b>	600 ml	11 bags	

## EPDM strips for exterior wall panels

Strips for flat exterior wall panels





Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per roll	Advantages
	3647823	311800074	5705636096339	<b>EPDM strip</b> *74 mm	30 m	<ul style="list-style-type: none"> <li>The strips compensate for unevenness in the surface, distributing the load forces and shear stresses in the structure</li> </ul>
	1259225	311864452	5705636096346	*20 mm	30 m	

\* Special order. Delivered to order.  
Available in other dimensions.  
Please contact us on tel. +45 8747 6666


## Butyl tape



Soft adhesive butyl rubber, typically used as a seal between sheets.

Illustration	DB no.	DAFA no.	EAN no.	Dimensions	Contents per box	Total contents	Advantages
	4089371	233000006	5705636096001	<b>TYPE 303, gray</b> Ø6 mm	22 x 8 m rolls	176 m	<ul style="list-style-type: none"> <li>Typically used as an alternative to sealant, as the butyl rubber does not flow out when compressed</li> <li>Both types have good adhesion on most surfaces. Type 390 is the most adhesive</li> <li>UV and weather resistant</li> <li>Other dimensions and colors available by agreement</li> <li>DAFA butyl tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	4089389	233000008	5705636096018	Ø8 mm	22 x 6 m rolls	132 m	
	4089397	233000010	5705636096025	Ø10 mm	18 x 4.75 m rolls	85.5 m	
	4089413	233000310	5705636096049	<b>TYPE 303, gray</b> 3 x 10 mm	22 x 15 m rolls	330 m	
		4089421	233100006	5705636096056	<b>TYPE 390, black</b> Ø6 mm	22 x 8 m rolls	
2390350		620046600	5705636270852	<b>TYPE HQ B2, black</b> 2 x 10 mm	24 x 22,5 m rolls	540 m	
	4089454	233100310	5705636096094	<b>TYPE 390, black</b> 3 x 10 mm	22 x 15 m rolls	330 m	
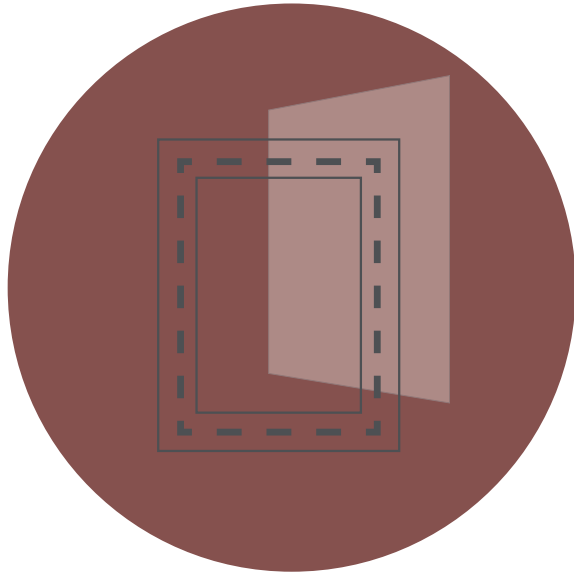
## Glass, window and door sealing




### Glass, window and door sealing

DAFA's system for sealing windows and doors includes solutions for external and internal sealing of new and existing windows and doors – and for renovating seals that have reached the end of their lifetime.

### [dafa-build.com/en/window](https://dafa-build.com/en/window)

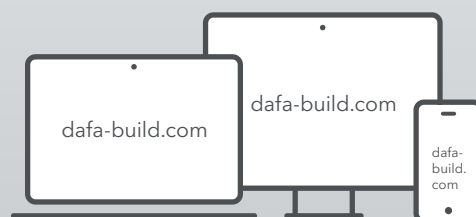
Get information wherever you are. Access to information from DAFA has become even easier. Our website has been optimized. This includes making it mobile-phone-friendly, so you can easily search via your mobile phone.








## Alu-Com™ glazing system

The Alu-Com glazing system is a complete window system that replaces all exterior wooden window strips. The system is made of maintenance-free aluminum and helps extend the lifetime of window and door elements.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per bundle.	Advantages
 <p>Measured from glass to frame front edge: 19 mm</p>	3647740 3818416	509158010 509158012	5705636006154 5705636006178	16 × 16 mm Anodized White	6 m 6 m	30 m 30 m	<ul style="list-style-type: none"> <li>• Colors: anodized or white, RAL 9010</li> <li>• Reduces the risk of dry rot, mold and perforations in sealed glazing units</li> <li>• Used for all types of windows, new and old</li> <li>• No nail holes</li> <li>• GS approved</li> <li>• Including 1 m bottom rail with fitted rubber strip (excl. accessories)</li> </ul>
 <p>Measured from glass to frame front edge: 16-21 mm</p>	3647765 3818424	509157890 509157892	5705636006123 5705636006147	16 × 23,5 mm VN Anodized White	6 m 6 m	60 m 30 m	
 <p>Measured from glass to frame front edge: 22-26 mm</p>	3818440 3818432	509158870 509158872	5705636006239 5705636006253	16 × 30 mm VN Anodized White	6 m 6 m	30 m 30 m	
 <p>Measured from glass to frame front edge: 27-32 mm</p>	3818473 3818465	509158880 509158882	5705636006260 5705636006284	16 × 36 mm VN Anodized White	6 m 6 m	30 m 30 m	

## Accessories for Alu-Com™

The Alu-Com glazing system is a complete window system that replaces all exterior wooden window strips. The system is made of maintenance-free aluminum and helps extend the lifetime of window and door elements.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per bag	Advantages
	5175987	620002901	5705636239088	<b>Mounting clip for straight edge fits</b> fits 16 × 16  100P633C black	120 pcs	
	3647922	507015809	5705636005775	<b>Mounting clip for sloping edge fits</b> fits 16 × 23,5 16 × 30 16 × 36 VN  15-809 black	120 pcs	
	4376471	507016057	5705636005799	<b>Mounting clip for straight edge fits</b> fits 16 × 23,5 16 × 30 16 × 36VN  16-057 gray	120 pcs	
	5750360	507010140	5705636193090	<b>Mounting clip fits</b> fits 16 × 23,5 16 × 30 16 × 36 VN  100P014 sort	120 pcs	

## GL profile, aluminum bottom window strips

GL glass profile replaces the external wooden bottom casement profile. The strip is made of maintenance-free aluminum and helps extend the lifetime of window and door elements. The GL profile is easy to remove, for example when painting the window.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per bundle.	Advantages
 <p>24 mm 23 mm</p> <p>Measured from glass to frame front edge: 16-21 mm</p>	2533404 3818515	505024060 505024031	5705636005478 5705636005461	<b>Type 24</b> Anodized White	6 m 6 m	60 m 30 m	<ul style="list-style-type: none"> <li>• Colors: anodized or white, RAL 9010</li> <li>• Reduces the risk of dry rot, mold and perforations in sealed glazing units</li> <li>• Used for all types of windows, new and old</li> <li>• No nail holes</li> <li>• GS approved</li> <li>• Including 1 m bottom rail with fitted rubber strip</li> <li>• NB! Excl. accessories</li> </ul>
 <p>30 mm 23.7 mm</p> <p>Measured from glass to frame front edge: 22-26 mm</p>	2533420 3818523	505030060 505030031	5705636005508 5705636005492	<b>Type 30</b> Anodized White	6 m 6 m	60 m 30 m	
 <p>36 mm 24.5 mm</p> <p>Measured from glass to frame front edge: 27-32 mm</p>	2533446 3818531	505036060 505036031	5705636005539 5705636005522	<b>Type 36</b> Anodized White	6 m 6 m	30 m 30 m	
 <p>44 mm 25.48 mm</p> <p>Measured from glass to frame front edge: 33-40 mm</p>	8751034	505044060	5705636005553	<b>Type 44</b> Anodized	6 m	30 m	

## Accessories for GL profiles

GL glass profile replaces the external wooden bottom casement profile. The strip is made of maintenance-free aluminum and helps extend the lifetime of window and door elements. The GL profile is easy to remove, for example when painting the window.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per bag	Advantages
	4389649	507015738	5705636005676	<b>Mounting clip</b> 15-738C for GL	120 pcs	<ul style="list-style-type: none"> <li>• The mounting clips are intended for sloping bottom edges</li> <li>• For straight bottom edges, trim off the lower flap</li> <li>• NB! Calculated as follows: 4 mounting clips 4 alu clips</li> </ul>
	2677177	507000050	5705636005607	<b>Alu-Clips</b> 50 mm for GL	120 pcs	

## GL profile, aluminum bottom window strips - DIY packages

GL glass profile replaces the external wooden bottom casement profile. The strip is made of maintenance-free aluminum and helps extend the lifetime of window and door elements. The GL profile is easy to remove, for example when painting the window.

Illustration	DB no.	DAFA no.	EAN no.	Product text/length	Contents per box	Advantages
 <p>Measured from glass to frame front edge: 16-21 mm</p>	5106426	505024077	5705636237091	<b>Type 24</b> Anodized 1500 mm	20 pcs	<ul style="list-style-type: none"> <li>• Reduces the risk of dry rot, mold and perforations in sealed glazing units</li> <li>• Used for all types of windows, new and old</li> <li>• No nail holes</li> <li>• GS approved</li> <li>• Including bottom rail with fitted rubber strip</li> <li>• Incl. accessories</li> </ul>
	5106423	505024076	5705636237084	White 1500 mm	20 pcs	
 <p>Measured from glass to frame front edge: 22-26 mm</p>	5106427	505030077	5705636237114	<b>Type 30</b> Anodized 1500 mm	20 pcs	
	5106424	505030076	5705636237107	White 1500 mm	20 pcs	
 <p>Measured from glass to frame front edge: 27-32 mm</p>	5106428	505036077	5705636237138	<b>Type 36</b> Anodized 1500 mm	20 pcs	
	5106425	505036076	5705636237121	White 1500 mm	20 pcs	


## Butyl tape

Self-adhesive butyl rubber sealing strip for installing sealed glazing units.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per roll	Contents per box	Advantages
	3164480 2834307	331220309 331220310	5705636096377 5705636096384	3 × 9 mm 3 × 10 mm	22 m 22 m	572 m 528 m	<ul style="list-style-type: none"> <li>• Approved for glass installation under the GS installation instructions</li> <li>• DAFA butyl tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>


## DAFA Kron™

Adhesive cellular rubber strips, specially made for the installation of sealed glazing units. Extruded strips with grooved/fluted surface.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per reel	Contents per box	Advantages
				<b>DAFA Kron strips, profiled</b>			<ul style="list-style-type: none"> <li>• Weather resistant</li> <li>• Approved for installing sealed glazing units</li> <li>• DAFA Kron strips in sizes 4 × 9 mm, 4 × 10 mm and 5 × 10 mm may be used WITHOUT top sealing, other dimensions must be top sealed</li> <li>• DAFA Kron is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings!</li> </ul> <p>NB! IMPORTANT: The bottom rebate of the frame must be slanted and properly ventilated.</p>
	5024318	331800208	5705636100692	2 × 8 mm	225 m	1350 m	
	2533172	331800309	5705636096469	3 × 9 mm	150 m	900 m	
	2533180	331800408	5705636096476	4 × 8 mm	150 m	900 m	
	2834299	331800409	5705636096483	4 × 9 mm	125 m	750 m	
	2533198	331800410	5705636096490	4 × 10 mm	125 m	750 m	
	5024319	331800415	5705636096506	4 × 15 mm	75 m	450 m	
	2533206	331800510	5705636096520	5 × 10 mm	100 m	600 m	
	5024321	331800610	5705636096537	6 × 10 mm	75 m	450 m	
	5024322	331800615	5705636096544	8 × 15 mm	50 m	150 m	

## DAFA Cell™

Adhesive cellular rubber strips, specially made for the installation of sealed glazing units. Cut strips with a flat surface.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per reel	Contents per box	Advantages
				<b>DAFA Cell strips</b>			<ul style="list-style-type: none"> <li>• Weather resistant</li> <li>• Approved for installing sealed glazing units</li> <li>• DAFA Cell is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul> <p>NB!</p> <ul style="list-style-type: none"> <li>• DAFA Cell strips less than 4 × 8 mm are NOT approved for the installation of sealed glazing units.</li> <li>• The strips must not be stretched during installation</li> <li>• IMPORTANT: The bottom rebate of the frame must be slanted and properly ventilated.</li> </ul>
	1259373	331200208	5705636004785	2 × 8 mm	225 m	1350 m	
	1259381	331200210	5705636004792	2 × 10 mm	200 m	1200 m	
	1259399	331200308	5705636004808	3 × 8 mm	150 m	900 m	
	1259407	331200310	5705636004815	3 × 10 mm	150 m	900 m	
	1259423	331200408	5705636004822	4 × 8 mm	125 m	750 m	
				Other dimensions available			

## EPDM glazing profiles

Extruded rubber profiles with groove mount, specially designed for the installation of sealed glazing units.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	1673356	620004383	5705636280189	<b>For Alu-Com 15-287*</b>	300 m	<ul style="list-style-type: none"> <li>• Color: Black</li> <li>• Weather resistant</li> <li>• No top seal</li> <li>• No adhesive</li> <li>• Can handle large tolerances</li> <li>• Effectively diverts water away from the wooden strip</li> <li>• NB! Must not be painted</li> <li>• Cannot withstand grease and oil</li> <li>• Must not be stretched during installation</li> </ul>
	5024442	331415422	5705636097930	<b>For wooden strips 15-422*</b>	300 m	
	3647948 5024444	331315576 331415576	<b>For wooden strips</b> 5705636096414 5705636209098	<b>For wooden strips 15-576 15-576*</b>	300 m 300 m	
	5024445	331415856	5705636097923	<b>For wooden strips 15-856*</b>	300 m	
	1914780	620004384	5705636280196	<b>For Alu-Com 15-810*</b>	300 m	
	1914781**	301016744	5705636193649	<b>For wooden strips 16-744*</b>	250 m	








\* Surface treated.

\*\* Special order.

## Q-Lon sealing strips



Q-Lon sealing strips for windows and doors meet the industry's strict standards for sealing windows and doors and offer an ideal and lasting sealing solution.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
<p>Profile height: 6.5 mm Edge width: 11 mm For stapling Air: 3.0-5.5 mm</p> 	5882913	401542100	5705636122342	<b>Q-Lon 3042</b> for stapling	100 m	<ul style="list-style-type: none"> <li>• Q-Lon strips do not have to be welded or glued in corners, but simply mitred using special cutters</li> <li>• The strip consists of a rigid core overlaid with a highly elastic PU foam with a smooth, dirt-repellent and hard-wearing PE foil</li> <li>• Excellent deformation properties - returns to its original shape after extended compression</li> <li>• The surface is resistant to all types of paint, preventing subsequent adhesion problems</li> <li>• An extremely soft strip, ensuring low closing pressure</li> <li>• Weather resistant</li> <li>• Simple and easy installation</li> <li>• Excellent acoustic properties</li> <li>• Cradle to Cradle™ Silver certified</li> <li>• Q-Lon sealing strips are listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
<p>Profile height: 7.5 mm Edge width: 10 mm Groove: 3 x 6 mm Air: 4.0-6.0 mm</p> 	5812180 5882916	401330541 401554100	5705636101224 5705636122373	<b>Q-Lon 3054</b> <b>Q-Lon 3054</b>	500 m** 100 m	
<p>Profile height: 8.7 mm Edge width: 10.5 mm For stapling Air: 3.0-5.5 mm</p> 	5882914 1377750	401559100 620015111	5705636122359 5705636348759	<b>Q-Lon 3059</b> for stapling <b>DIY box</b>	100 m 10 m/pk.*	
<p>Profile height: 12.0 mm Edge width: 15 mm For stapling Air: 5.0-10.0 mm</p> 	5882915 1377752	401561100 620015112	5705636122366 5705636348766	<b>Q-Lon 3061</b> for stapling <b>DIY box</b>	100 m 10 m/pk.*	
<p>Profile height: 8.9 mm Edge width: 13 mm Groove: 4-5 x 8 mm Air: 5.5-7.5 mm</p> 	5812178 5882918	401330621 401562100	5705636101248 5705636122397	<b>Q-Lon 3062</b>	400 m 100 m	
<p>Profile height: 7.7 mm Edge width: 13 mm Groove: 4-5 x 8 mm Air: 4.0-6.0 mm</p> 	5812179 5882919	401330671 401567100	5705636101231 5705636122403	<b>Q-Lon 3067</b>	400 m 100 m	
<p>Profile height: 8.2 mm Edge width: 11 mm Groove: 4 x 7 mm Air: 4.5-6.5 mm</p> 	5882920 1441707	401568100 620016918	5705636122410 5705636360232	<b>Q-Lon 3068</b> <b>DIY box</b>	100 m 10 m/pk.*	



\* Minimum purchase 10 boxes of 10 m.






\*\* Special order. Delivery time at least 6 weeks.

NB! All our Q-Lon strips are gray, but are available in other colors on request.

Call us on +45 8747 6666

## Q-Lon sealing strips - continued ...

Q-Lon sealing strips for windows and doors meet the industry's strict standards for sealing windows and doors and offer an ideal and lasting sealing solution.





Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
 <p>Profile height: 10.9 mm Edge width: 13 mm Groove: 4.5 x 8 mm Air: 5.0-8.0 mm</p>	5634062 5243019 1377754	401330731 620006548 620015113	5705636155227 5705636284279 5705636348773	<b>Q-Lon 3073</b>  <b>DIY box</b>	400 m 100 m 10 m*	<ul style="list-style-type: none"> <li>• Q-Lon strips do not have to be welded or glued in corners, but simply mitred using special cutters</li> <li>• The strip consists of a rigid core overlaid with a highly elastic PU foam with a smooth, dirt-repellent and hard-wearing PE foil</li> <li>• Excellent deformation properties - returns to its original shape after extended compression</li> <li>• The surface is resistant to all types of paint, preventing subsequent adhesion problems</li> <li>• An extremely soft strip, ensuring low closing pressure</li> <li>• Weather resistant</li> <li>• Simple and easy installation</li> <li>• Excellent acoustic properties</li> <li>• Cradle to Cradle™ Silver certified</li> <li>• Q-Lon sealing strips are listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul> 
 <p>Profile height: 8.5 mm Edge width: 6.5 mm Groove: 3 x 7 mm Air: 3.5-5.5 mm</p>	5966969 5966968 1377771	401330741 401574100 620015114	5705636132389 5705636138152 5705636348780	<b>Q-Lon 3074</b>  <b>DIY box</b>	600 m 100 m 10 m*	
 <p>Profile height: 9.0 mm Edge width: 10.5 mm Groove: 3 x 6 mm Air: 4.0-7.5 mm</p>	5024323 5243020	401330781 620006549	5705636201726 5705636284286	<b>Q-Lon 3078</b>	600 m 100 m	
 <p>Profile height: 9.0 mm Edge width: 10.0 mm Groove: 4 x 7 mm Air: 5.0-7.5 mm</p>	5107916 5243021	401331021 620006550	5705636231150 5705636284293	<b>Q-Lon 3102</b>	400 m 100 m	

\* Minimum purchase 10 boxes of 10 m.

NB! All our Q-Lon strips are gray, but are available in other colors on request. Call us on +45 8747 6666

## Q-Lon cutter

Accessories for Q-Lon - sealing strip cutter with pressure roller, V model. The cutter has plastic handles and a convenient pressure roller to press the strips into place.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	5899760	401399996	5705636100425	<b>Q-Lon cutter</b>	1 pc	<ul style="list-style-type: none"> <li>• The knife blade can be replaced with a traditional 18 mm 'break-off' blade</li> <li>• Great for cutting sealing strips at outside corners</li> <li>• The cutter leaves one edge on the outside of the strip, where it bends</li> </ul>
	5899761	401399993	5705636107561	<b>Nylon roll for Q-Lon cutter</b>	1 pc	
	5899762	401399994	5705636107578	<b>Back plate for Q-Lon cutter</b>	1 pc	
	5899763	401399992	5705636107554	<b>Blades for Q-Lon cutter</b>	10 pcs	



## Lozaron PVC sealing strips



The strips have been used in countless windows and doors over the past 30 years as a seal between the sash and frame. The strip consists of a solid mounting base and a soft lip seal.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per box	Advantages
	2326528	401200627	5705636096568	<b>DX627</b>	10 x 2.1 m lengths	<ul style="list-style-type: none"> <li>• Color: Gray</li> <li>• Very elastic</li> <li>• Weather resistant</li> <li>• NB! When welding, the cut surfaces must not be heated so much that the profile becomes charred.</li> <li>• The staples must not be countersunk in the LOZARON material. This can cause bulging between the staples and a risk of penetration. The correct pressure for compressed air staple guns should be found through trial and error.</li> <li>• NOT resistant to solvents such as gasoline, benzol, methanol and turpentine. However, brief exposure in connection with impregnation, cleaning paint etc. will not adversely affect the properties of the sealing strips.</li> <li>• If paint gets on the strips this must be cleaned off immediately. Acrylic plastic painted or impregnated surfaces must not come into contact with LOZARON until they have hardened. Bleeding may occur with acrylic-painted surfaces, which may lead to sticking.</li> <li>• Lozaron sealing strips are listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings</li> </ul>
	1726710	401200856	5705636096612	<b>DX856</b>	1 x 40 m roll	
	2020101	620033814	5705636461380	<b>DX759</b>	1 x 150 m roll	

## DAFA Tæt™

Used for repairing seals on windows and doors.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents per bag	Advantages
	1598194	620000599	5705636249513	<b>White-painted wooden strip</b> with white Q-Lon 3074 9 x 15 mm	20 x 2400 mm lengths	<ul style="list-style-type: none"> <li>• Seals all types of doors and windows</li> <li>• Simple and easy installation</li> <li>• Durable surface</li> <li>• The sealing strip does not stick to paint</li> <li>• Soft and highly elastic sealing strip</li> </ul>
	1598196	620000600	5705636249520	12 x 21 mm	10 x 2100 mm lengths	

# Aqua-Stop™

- a secure solution

The inward opening Aqua-Stop bottom door strip has a drainage system to ensure that encroaching water can be led away from the structure.

### Advantages

- Used with both inward and outward opening doors
- Attractive and hard-wearing surface
- Effectively drains encroaching water away from the structure
- Airtight - even with open drain holes
- Prevents cold bridges
- Maintenance-free



## Aqua-Stop™, aluminum door threshold


The built-in drainage system allows encroaching water to be led away in inward-opening doors.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Contents	Advantages
	1275998	620002226	5705636260860	<b>Type 4970 IND / 6200 mm</b>	1 pc	<ul style="list-style-type: none"> <li>• The visible surface consists of a smooth, anodized aluminum strip</li> <li>• The built-in drainage system allows encroaching water to be led away in inward-opening doors, and also prevents a cold bridge forming</li> <li>• The plastic strip ensures that the system has a good thermal insulation value</li> <li>• With a maximum height of 25 mm, it can be used in housing for the disabled</li> <li>• Meets high airtightness requirements for inward and outward opening doors</li> <li>• Ensures optimal surfaces for connection joints</li> </ul>
	1275994	620002225	5705636260853	<b>Type 4970 UD / 6200 mm</b>	1 pc	
	1276028	620002743	5705636264738	<b>Type 5466 IND / 6200 mm</b>	1 pc	
	1276026	620002742	5705636264721	<b>Type 5466 UD / 6200 mm</b>	1 pc	

## Draft excluders

Used for sealing doors, windows, garage doors and metal structures, where there is a requirement to have very little friction when opening and closing.

Illustration	DB no.	DAFA no.	EAN no.	Product text	Length	Contents per box	Advantages
	3647856 3647864	504000248 504000251	5705636005409 5705636005416	<b>ALU 25L</b> <b>ALU 25L</b>	1 m 3 m	10 pcs 10 pcs	<ul style="list-style-type: none"> <li>• For screwing/groove mounting</li> <li>• Brushes made of polypropylene or horsehair depending on the type</li> <li>• Supplied with or without a stabilizing center rib</li> <li>• Supplied in rolls or factory lengths, depending on the type</li> <li>• Special types available</li> </ul>
	5107914	504000247	5705636072449	<b>ALU 40L</b>	1 m	5 pcs	
	5107915	504000246	5705636072432	<b>ALU 50L</b>	1 m	10 pcs	
	3647872	504000252	5705636005423	<b>ALU 25V</b>	1 m	10 pcs	
	2532646	401200908	5705636096650	<b>Lozaron DX908</b> Gray	2.1 m	21 m	



 **LinkedIn**  
[linkedin.com/showcase/dafa-building-solutions](https://www.linkedin.com/showcase/dafa-building-solutions)

 **Facebook**  
[@dafa.byg](https://www.facebook.com/dafa.byg)

## DAFA Group is consolidating its market position

DAFA Group wants to have an even greater focus on our two main business areas: Construction and Industry.

It is, therefore, natural to divide DAFA A/S into two companies. DAFA Industrial Solutions will remain in the current DAFA A/S company, while DAFA Building Solutions will be established in a new company.

In the future, you will find DAFA's building materials at:  
[www.dafa-build.com](http://www.dafa-build.com)

Please email us at: [dbs@dafa-group.com](mailto:dbs@dafa-group.com).




## In-house test center improves development of DAFA's products

To underscore and carry on the progressive development that has characterized DAFA's vapor barrier system, we can now conduct tests in our climate test chamber. The new test center allows us to perform aging tests - subjecting products to harsh climate impacts from heat, cold, UV light, and moisture. That will enable us to simulate the most commonly used and recognized national and international testing standards.



## A solid company

DAFA Building Solutions A/S is part of DAFA Group, with more than 80 years of experience. DAFA develops, produces, and sells a broad range of products and solutions for construction and industry that seal, absorb and protect. DAFA is Denmark's leading manufacturer and distributor in its field and has over 350 employees in Denmark, Sweden, Norway, Germany, Poland, Italy, China, and the USA.



## Quality assured and eco-friendly

DAFA's quality management system is certified under ISO 9001. This means that processes are performed and products delivered with consistent, stable quality, that is continually advanced and improved. This safeguards our customers and partners.

DAFA gives high priority to the environment and sustainability. It is therefore natural that we are environmentally certified under ISO 14001. This means that DAFA is constantly moving towards improved eco-friendly products, system solutions and processes. Read more at [dafa-group.com](http://dafa-group.com)

\* Applies to: DAFA A/S, DAFA Sverige AB, DAFA Deutschland GmbH, DAFA Sealing Technology (Tianjin) Co., Ltd., DAFA US Inc., DAFA Polska sp. z o.o.

\*\* Applies to: DAFA A/S, DAFA Sverige AB, DAFA Deutschland GmbH, DAFA Sealing Technology (Tianjin) Co., Ltd., DAFA US Inc.

DAFA disclaims liability for printing errors, suppliers' failure to deliver, sold out items and any changes made to the product range.



**DAFA Building Solutions is part of DAFA Group**

Denmark · Sweden · Germany · China · US · Norway · Poland · Italy

