

DAFA Duo Foil™ lining foil

DAFA Duo Foil lining foil is a part of DAFA AirStop System and is used for interior and exterior sealing around windows and doors.



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System.

Application

DAFA Duo Foil lining foil is a membrane with variable water vapour permeability, suitable for both interior and exterior sealing around windows and doors.

Its scratch-resistant construction allows installation in a single operation, eliminating difficult and time-consuming corner joints.

Adhesive on both sides simplifies positioning and installation. Use foil adhesive to bond the membrane to all horizontal surfaces.

The membrane is particularly suitable for sealing beneath terrace doors in multi-storey buildings. It bonds to concrete, plastic, wood and most other building materials.


DAFA Duo Foil helps protect the structure against moisture and reduces the risk of mould growth.

Product benefits

- Product information has been declared to Nordic Ecolabelling for new buildings under criteria generations 3 and 4. The product is not Nordic Swan Ecolabel certified.
- Suitable for interior and exterior use.
- Variable water vapour permeability.
- Adhesive on both sides.
- Time-saving.
- All-in-one installation.
- Reduces the risk of mould growth.



DAFA Duo Foil lining foil features an expandable fold that increases its width to accommodate variations in construction tolerances.

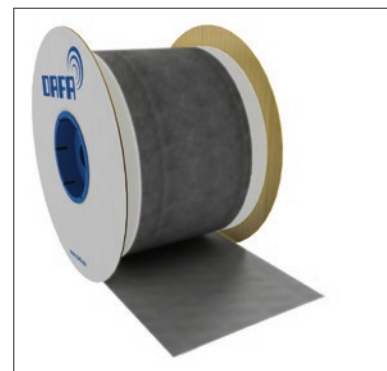

Dimension	Content per box
130 - 160 mm	3 rl. á 50 m.
180 - 210 mm	2 rl. á 50 m.
220 - 250 mm	1 rl. á 50 m.



DAFA Duo Foil lining foil in window structure.

Technical specifications

	DIN	Classification
Flammability	4102	B2, P-NDS05-594
Vapour diffusion	4108-3	Sd value between 0.21 m and 15 m depending on the average air humidity. Intelligent vapour barrier.
Adhesiveness for butyl		12 N/25 mm
Self-adhesiveness		12 N/25 mm
Temperature resistance		-40 °C to +100 °C
Installation temperature		+5 °C to +45 °C
Shelf life		One year
Peel value	EN1939	35 N/25 mm