

# DAFA Renovation Collar

NEW

The DAFA Renovation Collar – part of the DAFA AirStop System – offers a simple and flexible way to achieve airtight sealing around existing pipes and cables in renovation projects.

## Use

DAFA Renovation Collars are used for air-tight sealing of the climate envelope in the event of penetrations of existing pipes and cables during renovation tasks. The collar is mounted directly on the substrate simply, quickly and safely. Self-vulcanizing, with a minimum overlap of 20 mm

## Material

The product consists of a black, soft, stretchable, UV-resistant, self-vulcanizing polyisobutylene. The back of the butyl is coated with a very strong acrylic adhesive. The adhesive is specially developed for sealing and laminating all types of vapor barriers, wind barriers, roofing membranes, and radon barriers.

## Dimensions

Ø115 mm with Ø4 mm hole - for cables/pipes from Ø5 to Ø30 mm  
 Ø160 mm with Ø25 mm hole - for pipes from Ø30 to Ø80 mm  
 Ø250 mm with Ø75 mm hole - for pipes from Ø80 to Ø140 mm  
 Ø300 mm with Ø130 mm hole - for pipes from Ø140 to Ø180 mm

## Product benefits


- Specifically designed for sealing tasks in renovation projects
- Self-vulcanizing
- Extremely stretchable
- Energy-saving due to tight penetrations/joints
- Only one flexible packing for common pipe dimensions/exhaust channels
- Mounted without the use of sealant, glue, grouting, etc.

## Item numbers



| Type    | DAFA no.  | EAN no.       |
|---------|-----------|---------------|
| Ø115 mm | 620046279 | 5705636532899 |
| Ø160 mm | 620046277 | 5705636532875 |
| Ø250 mm | 620046278 | 5705636532882 |
| Ø300 mm | 620047766 | 5705636535944 |

## Technical specs.

| Name                   | Unit             | Result                                              |
|------------------------|------------------|-----------------------------------------------------|
| Weight                 | g/m <sup>2</sup> | 2000                                                |
| Thickness              | mm               | 1 ± 0,2 mm                                          |
| Assembly temp.         | °C               | -10 to +60                                          |
| Temperature resistance | °C               | -60 to +80<br>(Tested up to 223 °C for 30 minutes.) |
| UV-stability           | Hours            | 18.000 (EN 1297)                                    |
| Storage                |                  | Dry, up to +40°C                                    |

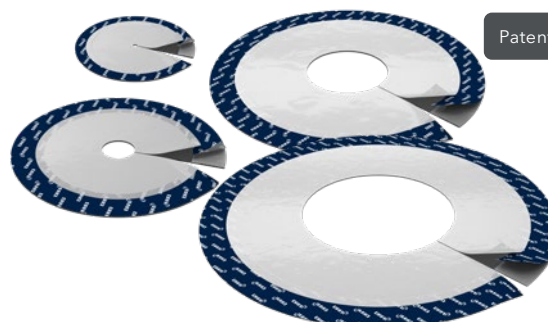

DAFA Renovation Collars Ø115, Ø160, Ø250, and Ø300 mm

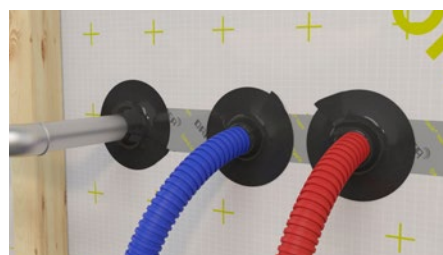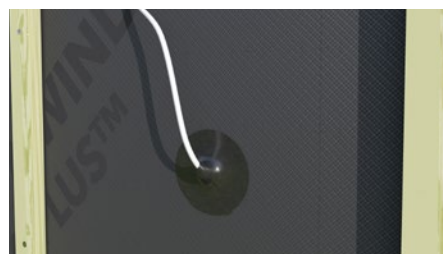

Watch the  
video – scan  
the QR code

