

# DAFA ExFoil sill foil



DAFA ExFoil sill foil is part of the DAFA AirStop System and ensures a vapor-proof solution in the construction.

## Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System.

### Application

The product is used as a seal between top strap and existing building part.

Can also be used as "adaptation foil" when installing DAFA ExFoil vapor barrier.

DAFA ExFoil sill foil makes it easy and convenient to seal with one single product according to the stricter requirements in the Building Regulations.

### Material

The multilayer structure with mesh reinforcement ensures an extremely stretch and tear-resistant vapor barrier foil. The foil must not be exposed to direct contact with wood preservative with added solvents.

### Advantages

- DAFA ExFoil sill foil is much more buildable than a regular PE foil, which makes installation easier and better.
- With the reinforcement mesh, DAFA ExFoil sill foil is far stronger than a PE foil.
- A more secure installation.
- Can be nailed, and has high tensile and tear strength.
- Functional and product warranty coverage for up to 30 years.
- DAFA ExFoil sill foil is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings.




DAFA ExFoil sill foil.  
500 mm or 1050 mm x 50 m



DAFA ExFoil sill foil  
- by the outer wall



DAFA ExFoil sill foil  
- by the inner wall

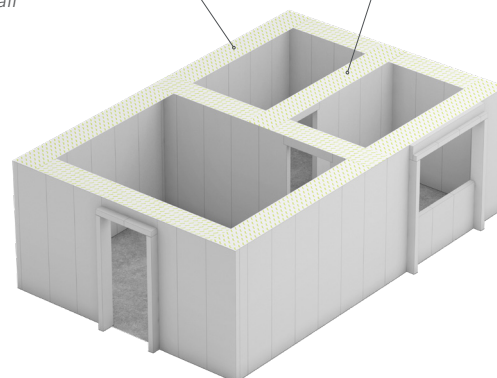

### Quality assurance

DAFA ExFoil sill foil is CE marked according to EU Standard EN 13984

Dimensions	DAFA product no.	EAN no.
500 mm x 50 m	620037331	5705636475455
1050 mm x 50 m	620037332	5705636475462

