



# DAFA counter-batten strip

## Warranty.



DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System.

### Application


DAFA counter batten-strip is specially designed for use in connection to installation of vapor barrier during renovation and re-insulation of roof constructions.

DAFA counter-batten is used to secure the DAFA HiFoil to the construction parts such as rafters etc. The foil is fixed to the rafter with staples pr. 100 mm.

Always make sure that the vapor barrier is secured to prevent the unnecessary damage when the vapor barrier is exposed to strain including tightness testing. It is likewise important that the vapor barrier isn't strapped too tight, so the joints are exposed to unnecessary strain.

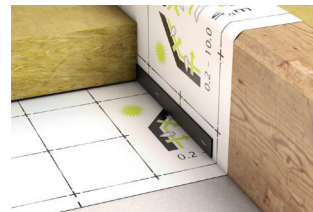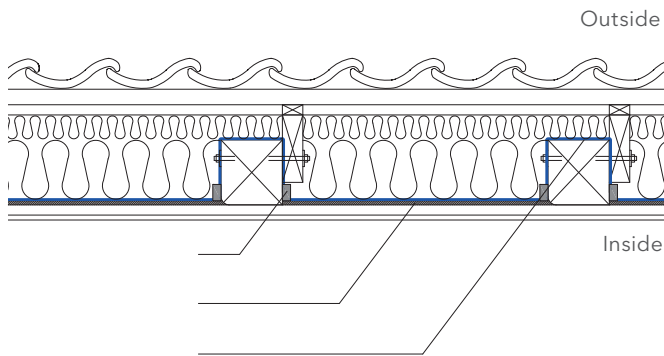

DAFA HiFoil is leveled out against DAFA IsoBatt and across the existing rafters. The membrane is fixed to the rafter with DAFA counter-batten.

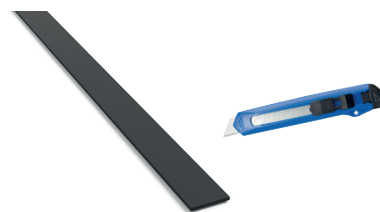

DAFA counter-batten is easily adjusted by cutting the profile and then breaking it off.

Properties	Value
Material	Polyvinylchloride with PVC
Dimensions	3 mm x 30 mm x 1220 mm
Water absorption	0,10 %
Water solubility	Insoluble
Installation temperature	-20 °C to +60 °C
Information	
Color	Anthracite
Contents per box	150 pcs.
DAFA item no.	620027282
DB no.	1863371
EAN no.	5705636429069

11/2019



dafa-group.com

Denmark · Sweden · Germany · China · US · Norway · Poland · Italy

