

DAFA UV tape

DAFA UV tape is a part of DAFA AirVent System and is perfect for taping wind barriers and roof decking.



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

Single-sided tape with exceptional strength and adhesion, suitable for overlapping on roof decking, wind barriers or difficult vapour barrier joints. Acrylic adhesive, solvent-free and water-based. The adhesive is highly resistant to moisture and other climate effects.

Material

DAFA UV tape is a single-sided tape made from acrylic.

DAFA UV tape is particularly suitable for outdoor use in the building envelope during difficult working and building conditions. The tape can also be used for vapour barriers in tough climates, or capillaries with fleece coating such as DAFA DiFoil.

DAFA UV tape can withstand direct sunlight, periodic heavy rain, moisture and large temperature fluctuations without losing its adhesive properties.


DAFA UV tape meets the stringent requirements in relation to permanent airtight seals for vapour barriers in accordance with EnEV (DIN 4108-7)

Areas of application


- Overlapping on roof decking
- Repairs of roof decking
- Wind barrier overlaps

Advantage

DAFA UV tape is listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings.

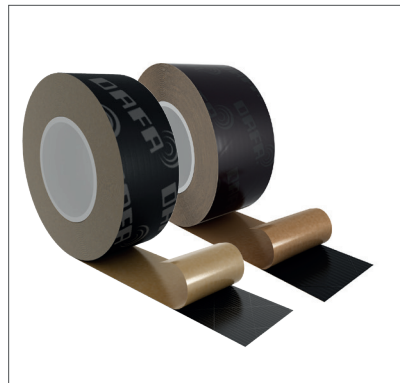

DAFA UV tape with and without logo.

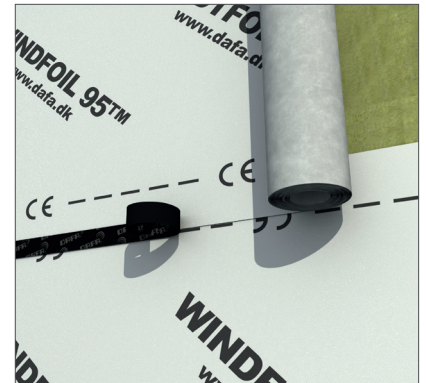

DAFA UV tape used for overlap on DAFA WindFoil 95.

Color / dimension	Contents per box	DAFA no.	EAN no.
Black 60 mm with logo	10 rolls of 25 m	620016905	5705636360164
Black 60 mm no logo*	10 rolls of 25 m	620026334	5705636425115
Black 100 mm with logo	6 rolls of 25 m	620025138	5705636413778
Black 100 mm no logo*	6 rolls of 25 m	620026300	5705636420523

* Black UV tape without logo is not a stock item.

Technical specifications

Thickness, foil + adhesive	(Without liner) 0,30-0,33 mm (DIN EN 1942)
Grammage	230-250 g/m ² (DIN EN ISO 536)
Peel-value	30 N/25 mm (DIN EN 1939)
Installation	Surfaces must be dry and free of dust and oil. Recommended installation temperature from +5 °C
Temperature resistance	-40 °C to +80 °C
Additional properties	APEO / solvent free and water based
Liner	Silicone paper, brown 90g /m ²



Eurofins-certification A+

01/2021

