

DAFA counter-batten tape



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

DAFA counter-batten tape is included in the DAFA AirVent System and is perfect for roof decking and wind barriers.

Application

DAFA counter-batten tape is a double-sided, polyester-reinforced butyl tape with strong adhesive properties.

DAFA counter-batten tape is used as a connection and fixing element between the roof decking and the counter-battens. The tape acts as a seal around screws and nails when the counter-batten is fitted.

Benefits

- High temperature resistance
- Outstanding thermal stability
- Retains its shape
- Self-vulcanizing
- Solvent-free
- No need for special tools

DAFA counter-batten tape can be used on most construction materials, metals and both rigid and flexible types of plastic.

The surface must be clean, dry and free from grease and dust. If DAFA counter-batten tape is fitted on porous substrates, the substrate must first be treated with a primer. We recommend the use of a primer in all cases.



Installation

- Prepare the surface
- Place the tape on the counter-batten
- Apply light pressure
- Remove the silicone backing sheet

Storage

Store the product in a dry and dark environment at temperatures between +5°C and +40°C.

The product's quality and characteristics will remain unchanged for a long time. However, we recommend that the material be used within 12 months.

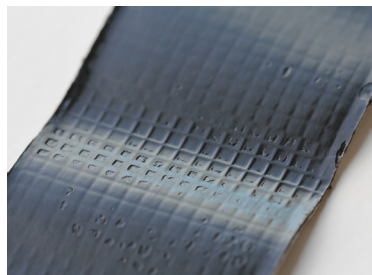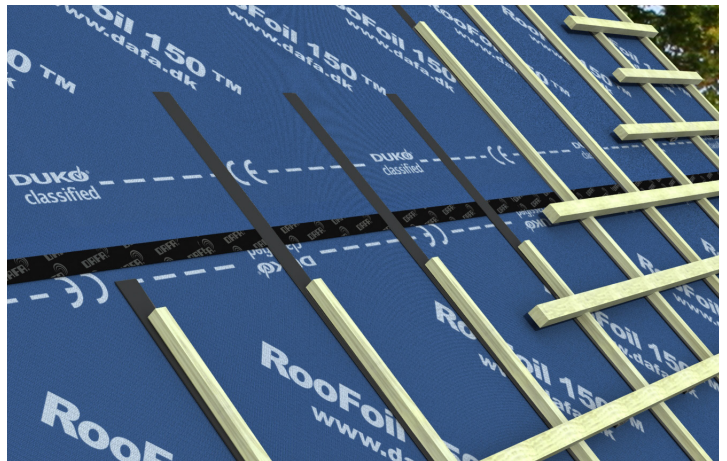

Technical specifications

Color	Black
Weight	1,4 g/cm ³ , ASTM D 1000
Measure	0,8 mm x 40 mm
Tensile strength	> 140 N/50 mm, EN 12311-1
Elongation upon failure	> 15 %
Peel-value at 90°	≥ 85 N, ASTM D 6195
Installation temperature	+5 °C / +40 °C
Temperature resistance	-40 °C / +130 °C
Fire classification	E (EN 11925 - 2; EN 13501 - 1)
Fire resistance	M1 (UNE 23727:1990 - UNE 23721:1990)

Dimension	Content per box	DAFA item no.	EAN no.
40 mm x 20 m	10 rl.	620025389	5705636415857



08/2019

