


DAFA Butyl 200 joint sealant

DAFA Butyl 200 is a non-hardening joint sealant used for sealing in various constructions.

Properties

- Color: light grey
- Good UV-resistance
- Good resistance against acids and alkalis.
- The surface must be kept clean, dry and free of oil and grease.
- Can be stored for up to one year (in a dry, cool and frost-free environment)
- DAFA Butyl 200 joint sealant is included in the Nordic Ecolabellings database of construction products that can be used in Swan-labelled buildings.

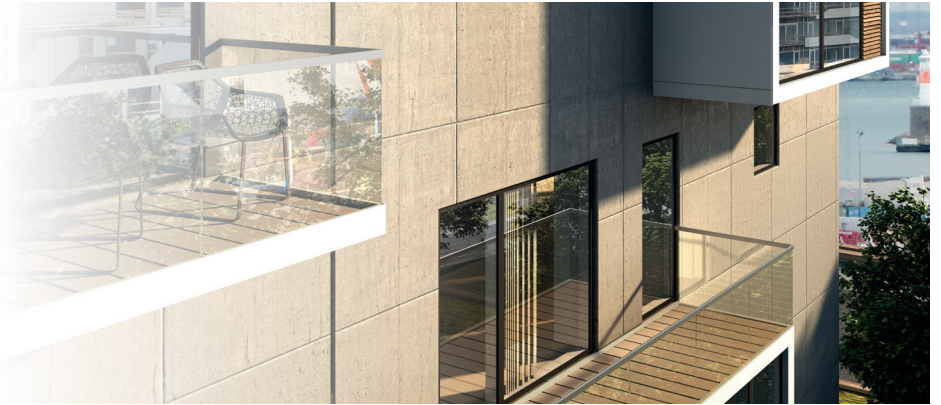

Please contact our customers service department for further information on +45 87 47 66 66



Butyl 200, tube 310 ml.



Butyl 200, bag 600 ml.

Type/contents	Contents per box	DAFA no.	EAN no.
Tube, 310 ml	25 tubes	233400100	5705636098944
Bag, 600 ml	12 bags	620010694	5705636313764

Technical specifications

Material	Non-hardening butyl joint sealant
Temperature resistance	-40 °C to +80 °C
Installation temperature	+5 °C to +30 °C
Storage	1 year. Store in dry, cool and frost-free environment
Density	1,6 g/cm ³
Resistance	Good UV-resistance. Good resistance against acids and alkalis
Color	Light grey

LCA calculation

Product	Unit	GWP-total (A1-A3)
DAFA Butyl 200	kg CO2 eq./m ²	1,09

NEW



Download EPD for DAFA Butyl 200 here:
www.dafa-build.com/en/epd
 or scan the QR code

06/2024

